Ref. No. 4089
082008

ONKYO SERVICE MANUAL

STEREO RECEIVER
MODEL TX-8555

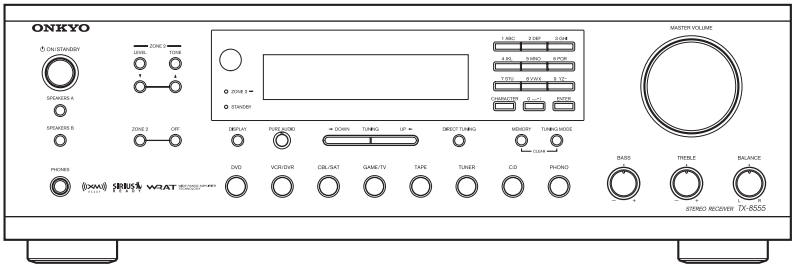



RC-728M

Black and Silver models

B MDC	120V AC, 60Hz
B MPP, S MPP	230 - 240V AC, 50Hz
B MPA	230 - 240V AC, 50Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK ⚠ ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.

ONKYO®
IMAGINATIVE SIGHT & SOUND

EXPLODED VIEW

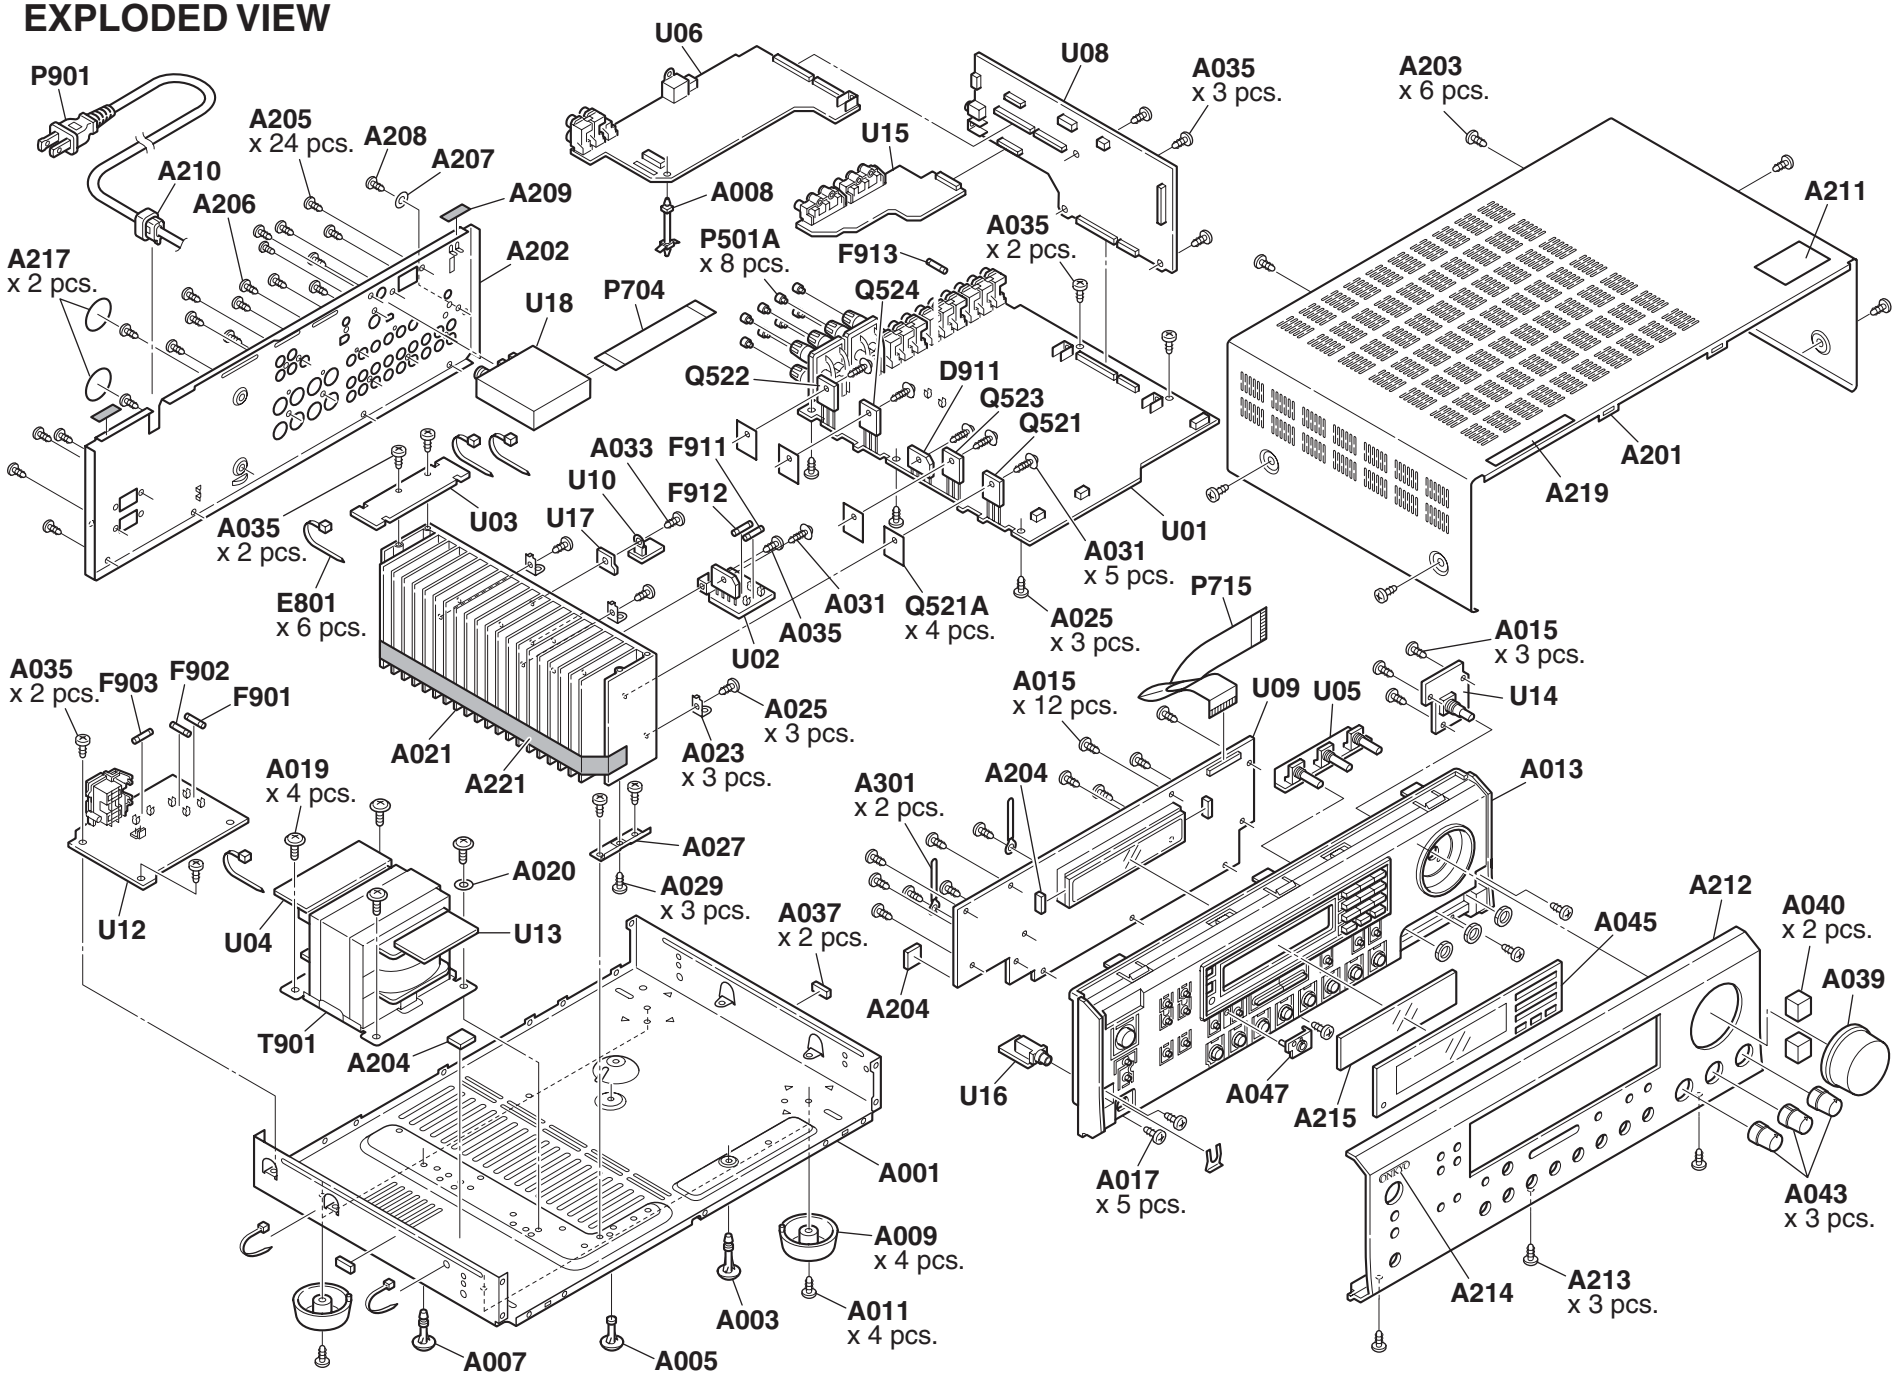

TX-8555

BLOCK DIAGRAM

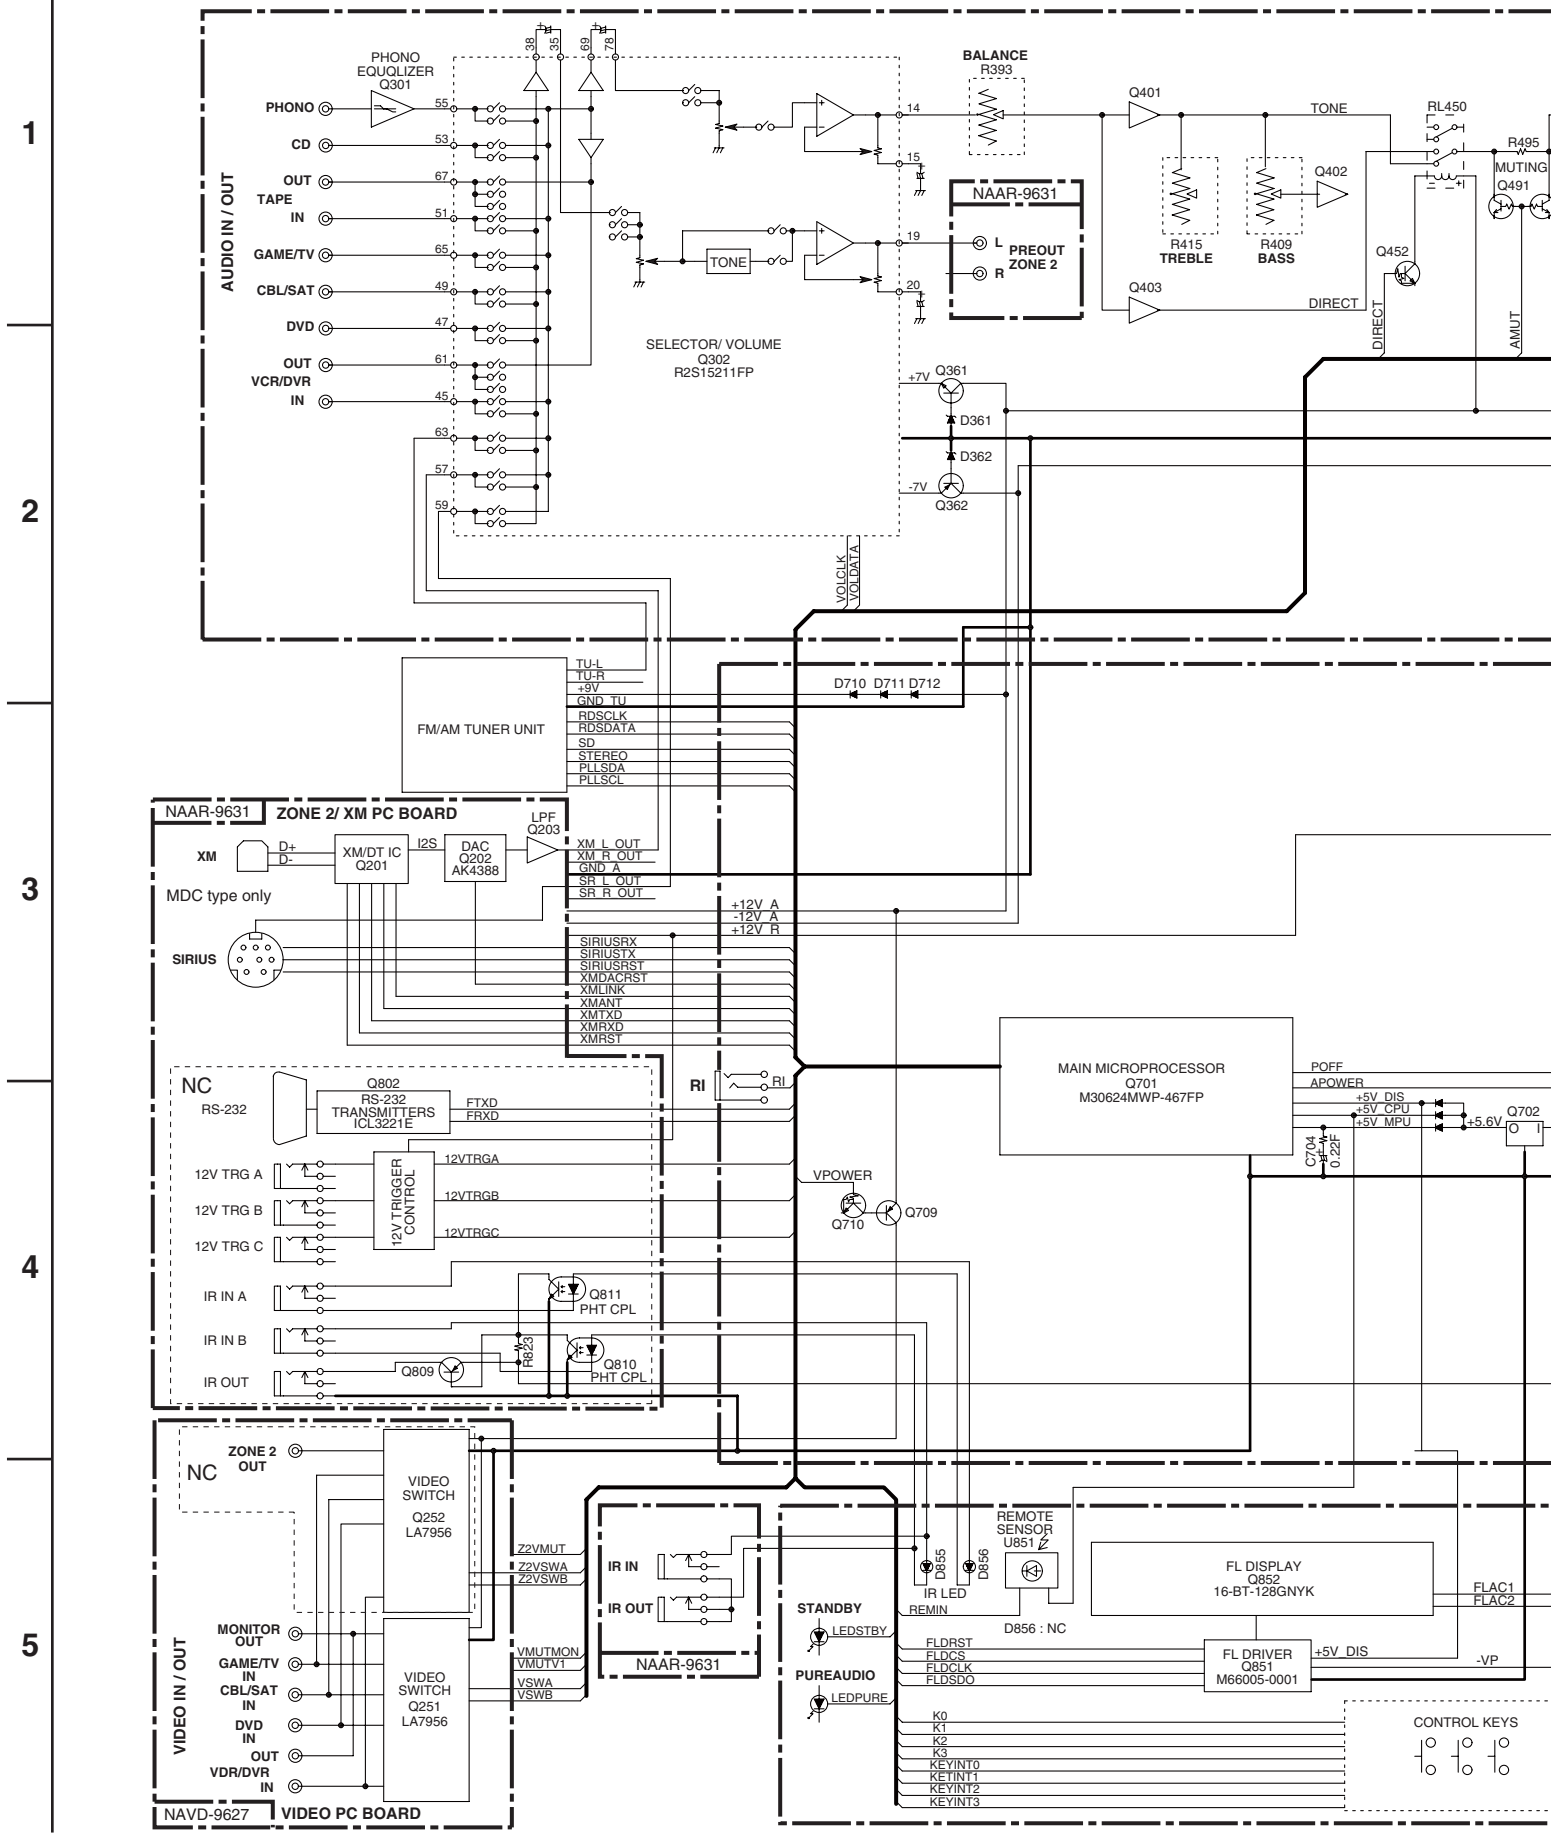

E F G H

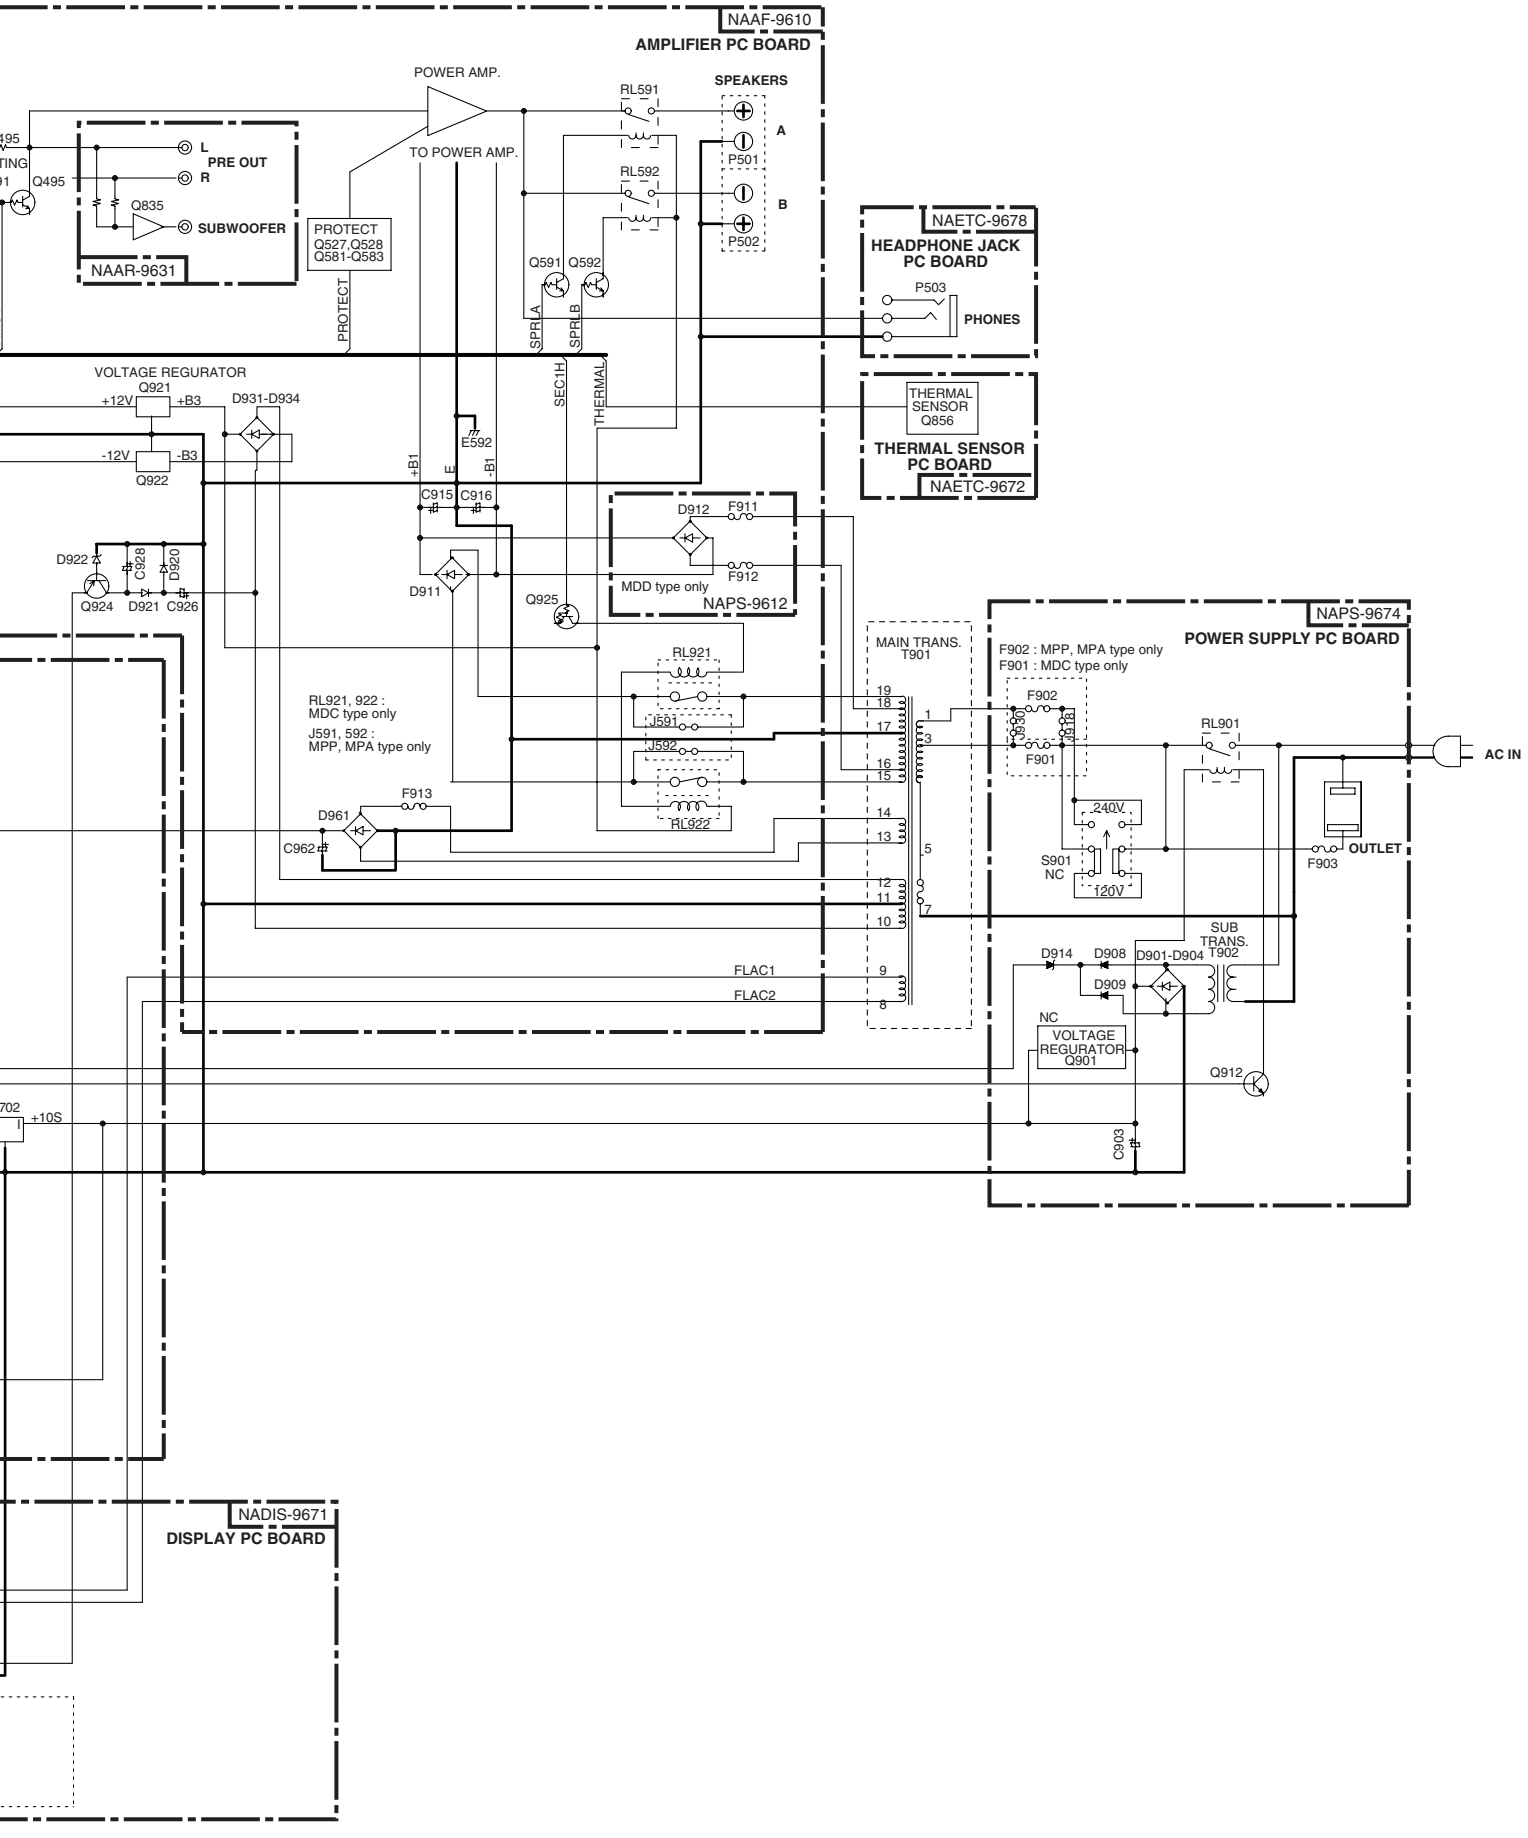
NAAF-9610
AMPLIFIER PC BOARD
POWER AMP.
TO POWER AMP.
SPEAKERS
RL591
RL592
A
B
P501
P502
L
R
PRE OUT
SUBWOOFER
Q495
Q835
NAAR-9631
PROTECT
Q527,Q528
Q581-Q583
PROTECT
Q591 Q592
SPRLA
SPRLB
NAETC-9678
HEADPHONE JACK
PC BOARD
P503
PHONES
VOLTAGE REGURATOR
Q921
+12V
+B3
D931-D934
-12V
-B3
Q922
SEC1H
THERMAL
THERMAL
SENSOR
Q856
THERMAL SENSOR
PC BOARD
NAETC-9672
+B1
E592
B1
C915 C916
D912
F911
F912
MDD type only
NAPS-9612
D922
C928
D920
Q924
D921
C926
D911
Q925
MAIN TRANS.
T901
RL921
RL921, 922 :
MDC type only
J591, 592 :
MPP, MPA type only
J591
J592
RL922
F913
D961
C962
NAPS-9674
POWER SUPPLY PC BOARD
F902 : MPP, MPA type only
F901 : MDC type only
F902
F901
RL901
AC IN
240V
120V
S901
NC
F903
OUTLET
SUB
TRANS.
T902
D914
D908
D901-D904
D909
NC
VOLTAGE
REGURATOR
Q901
Q912
C903
FLAC1
FLAC2
+10S
NADIS-9671
DISPLAY PC BOARD

SCHEMATIC DIAGRAMS-1(SD-1)

NAAF-9610 **U01**

AMPLIFIER SECTION

AMPLIFIER PC BOARD

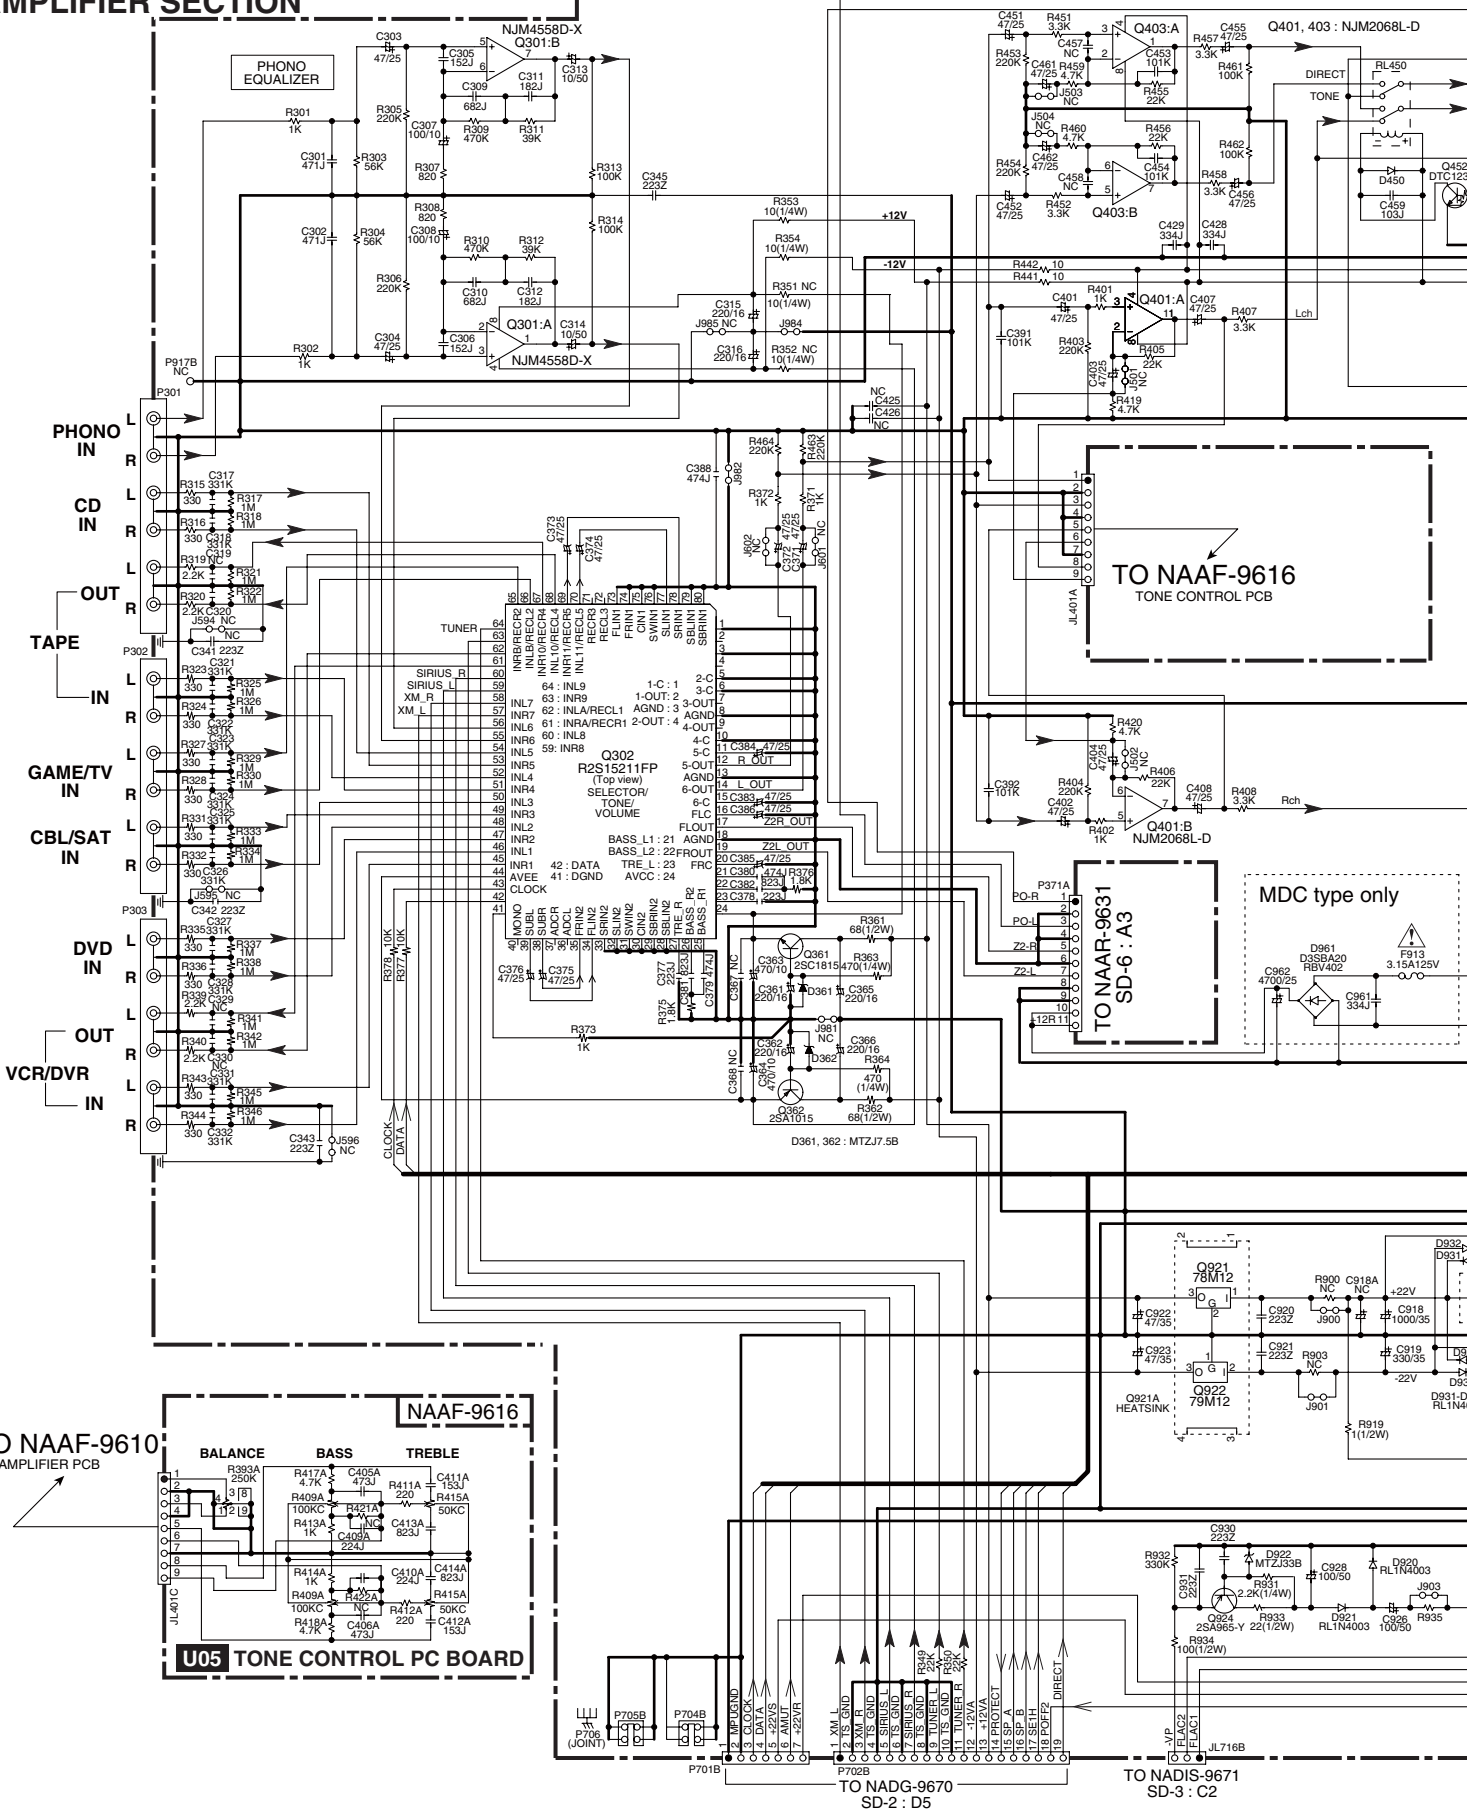

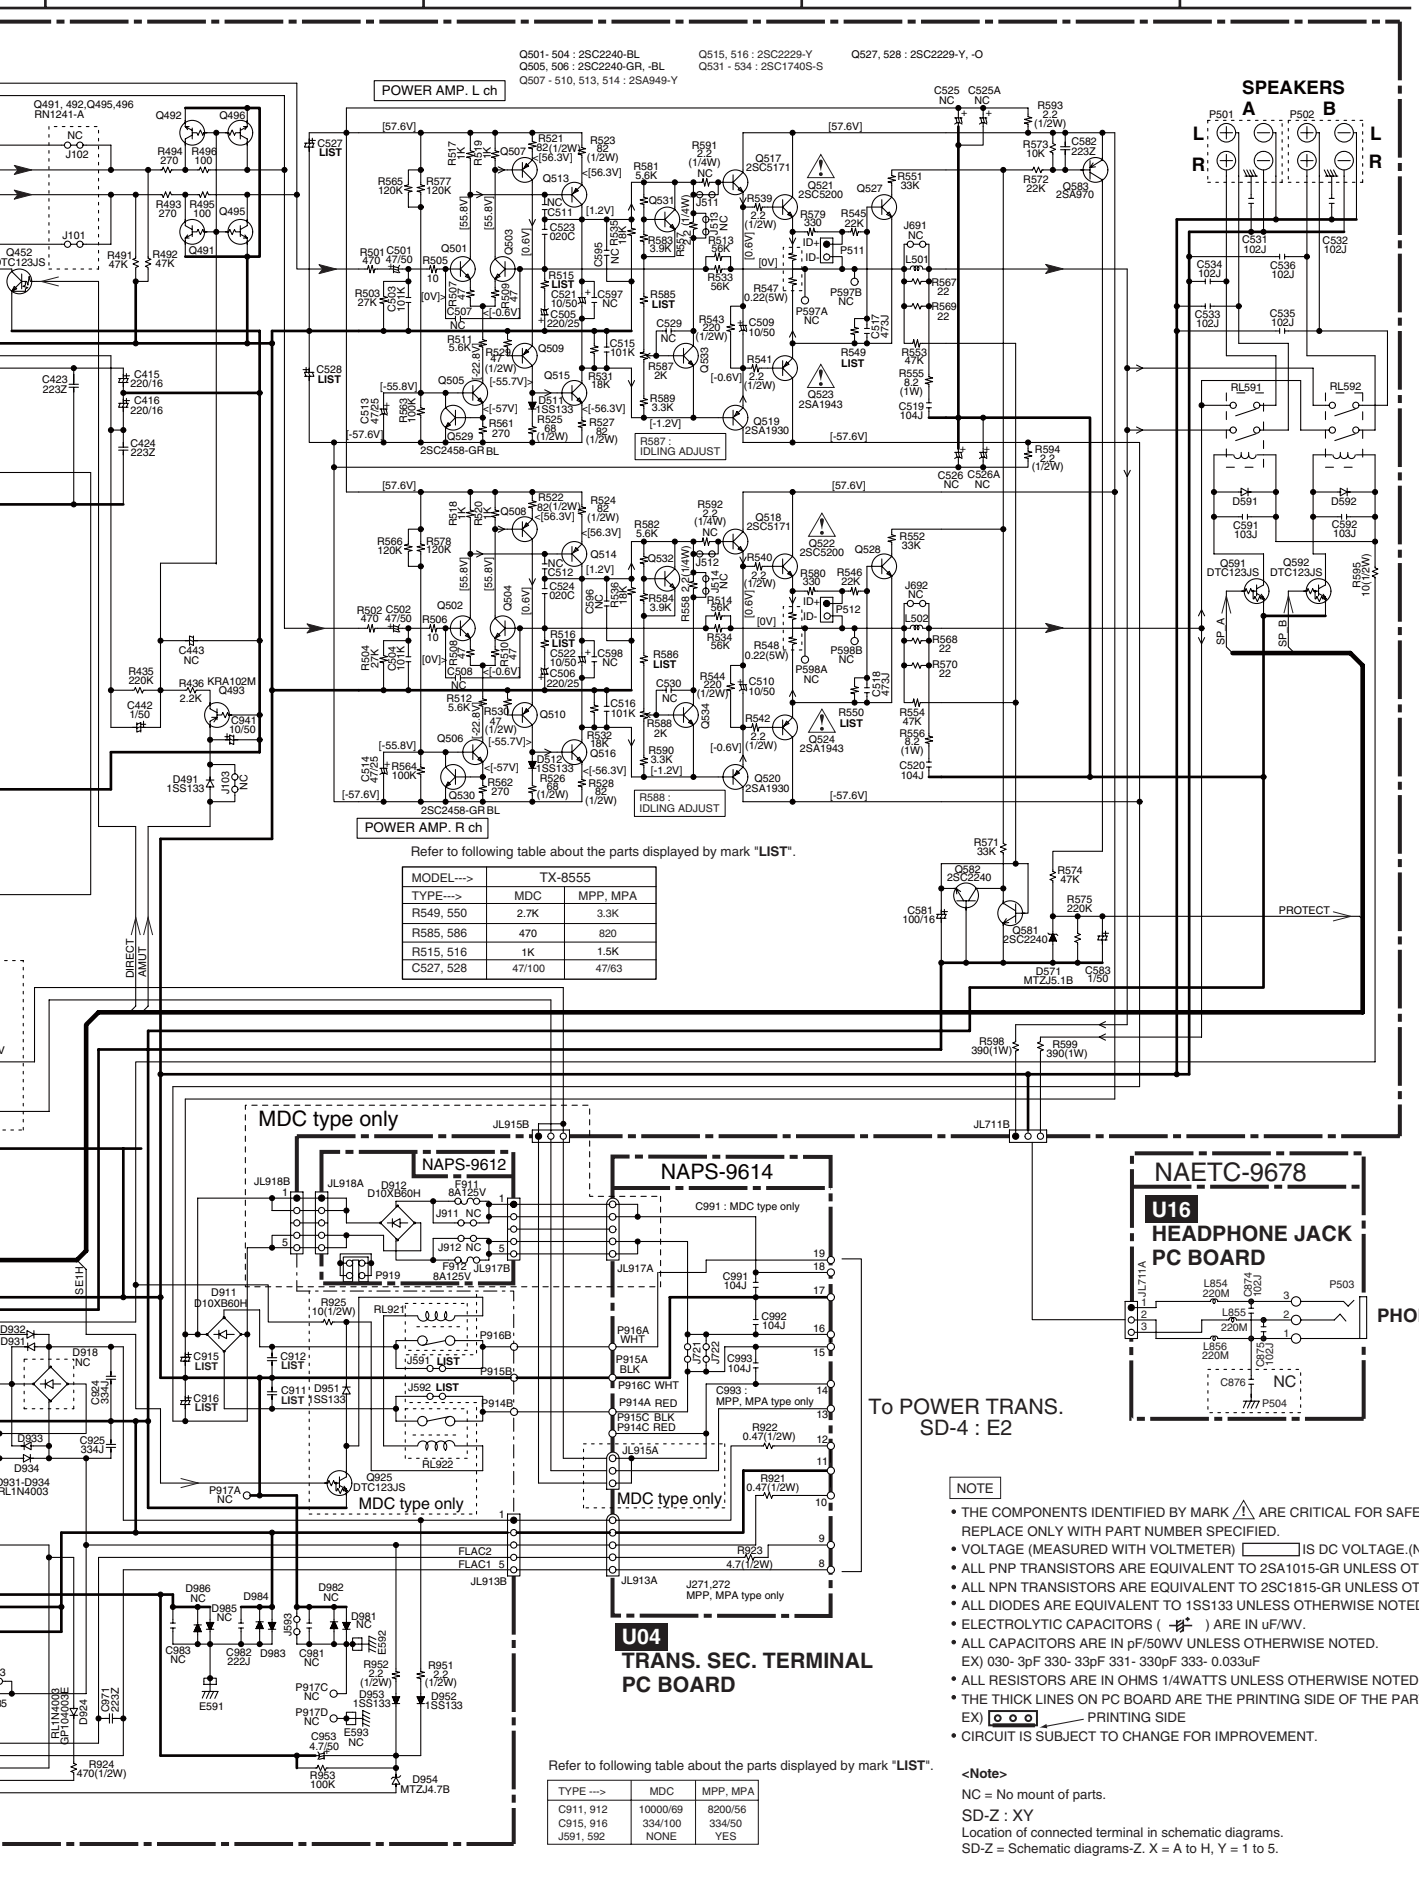
E
F
G
H
Q501- 504 : 2SC2240-BL
Q505, 506 : 2SC2240-GR, -BL
Q507 - 510, 513, 514 : 2SA949-Y
Q515, 516 : 2SC2229-Y
Q531 - 534 : 2SC1740S-S
Q527, 528 : 2SC2229-Y, -O
POWER AMP. L ch
POWER AMP. R ch
SPEAKERS
Refer to following table about the parts displayed by mark "LIST".
MODEL---> TX-8555
TYPE---> MDC MPP, MPA
R549, 550 2.7K 3.3K
R585, 586 470 820
R515, 516 1K 1.5K
C527, 528 47/100 47/63
MDC type only
NAPS-9612
NAPS-9614
C991 : MDC type only
MDC type only
MPP, MPA type only
NAETC-9678
U16
HEADPHONE JACK
PC BOARD
PHONES
To POWER TRANS.
SD-4 : E2
U04
TRANS. SEC. TERMINAL
PC BOARD
Refer to following table about the parts displayed by mark "LIST".
TYPE ---> MDC MPP, MPA
C911, 912 10000/69 8200/56
C915, 916 334/100 334/50
J591, 592 NONE YES
NOTE
• THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
• VOLTAGE (MEASURED WITH VOLTMETER) IS DC VOLTAGE.(NO INPUT SIGNAL).
• ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
• ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
• ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
• ELECTROLYTIC CAPACITORS ( ) ARE IN uF/WV.
• ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
• ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
• THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
EX) PRINTING SIDE
• CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.
<Note>
NC = No mount of parts.
SD-Z : XY
Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

SCHEMATIC DIAGRAMS-2(SD-2)

MICROPROCESSOR SECTION

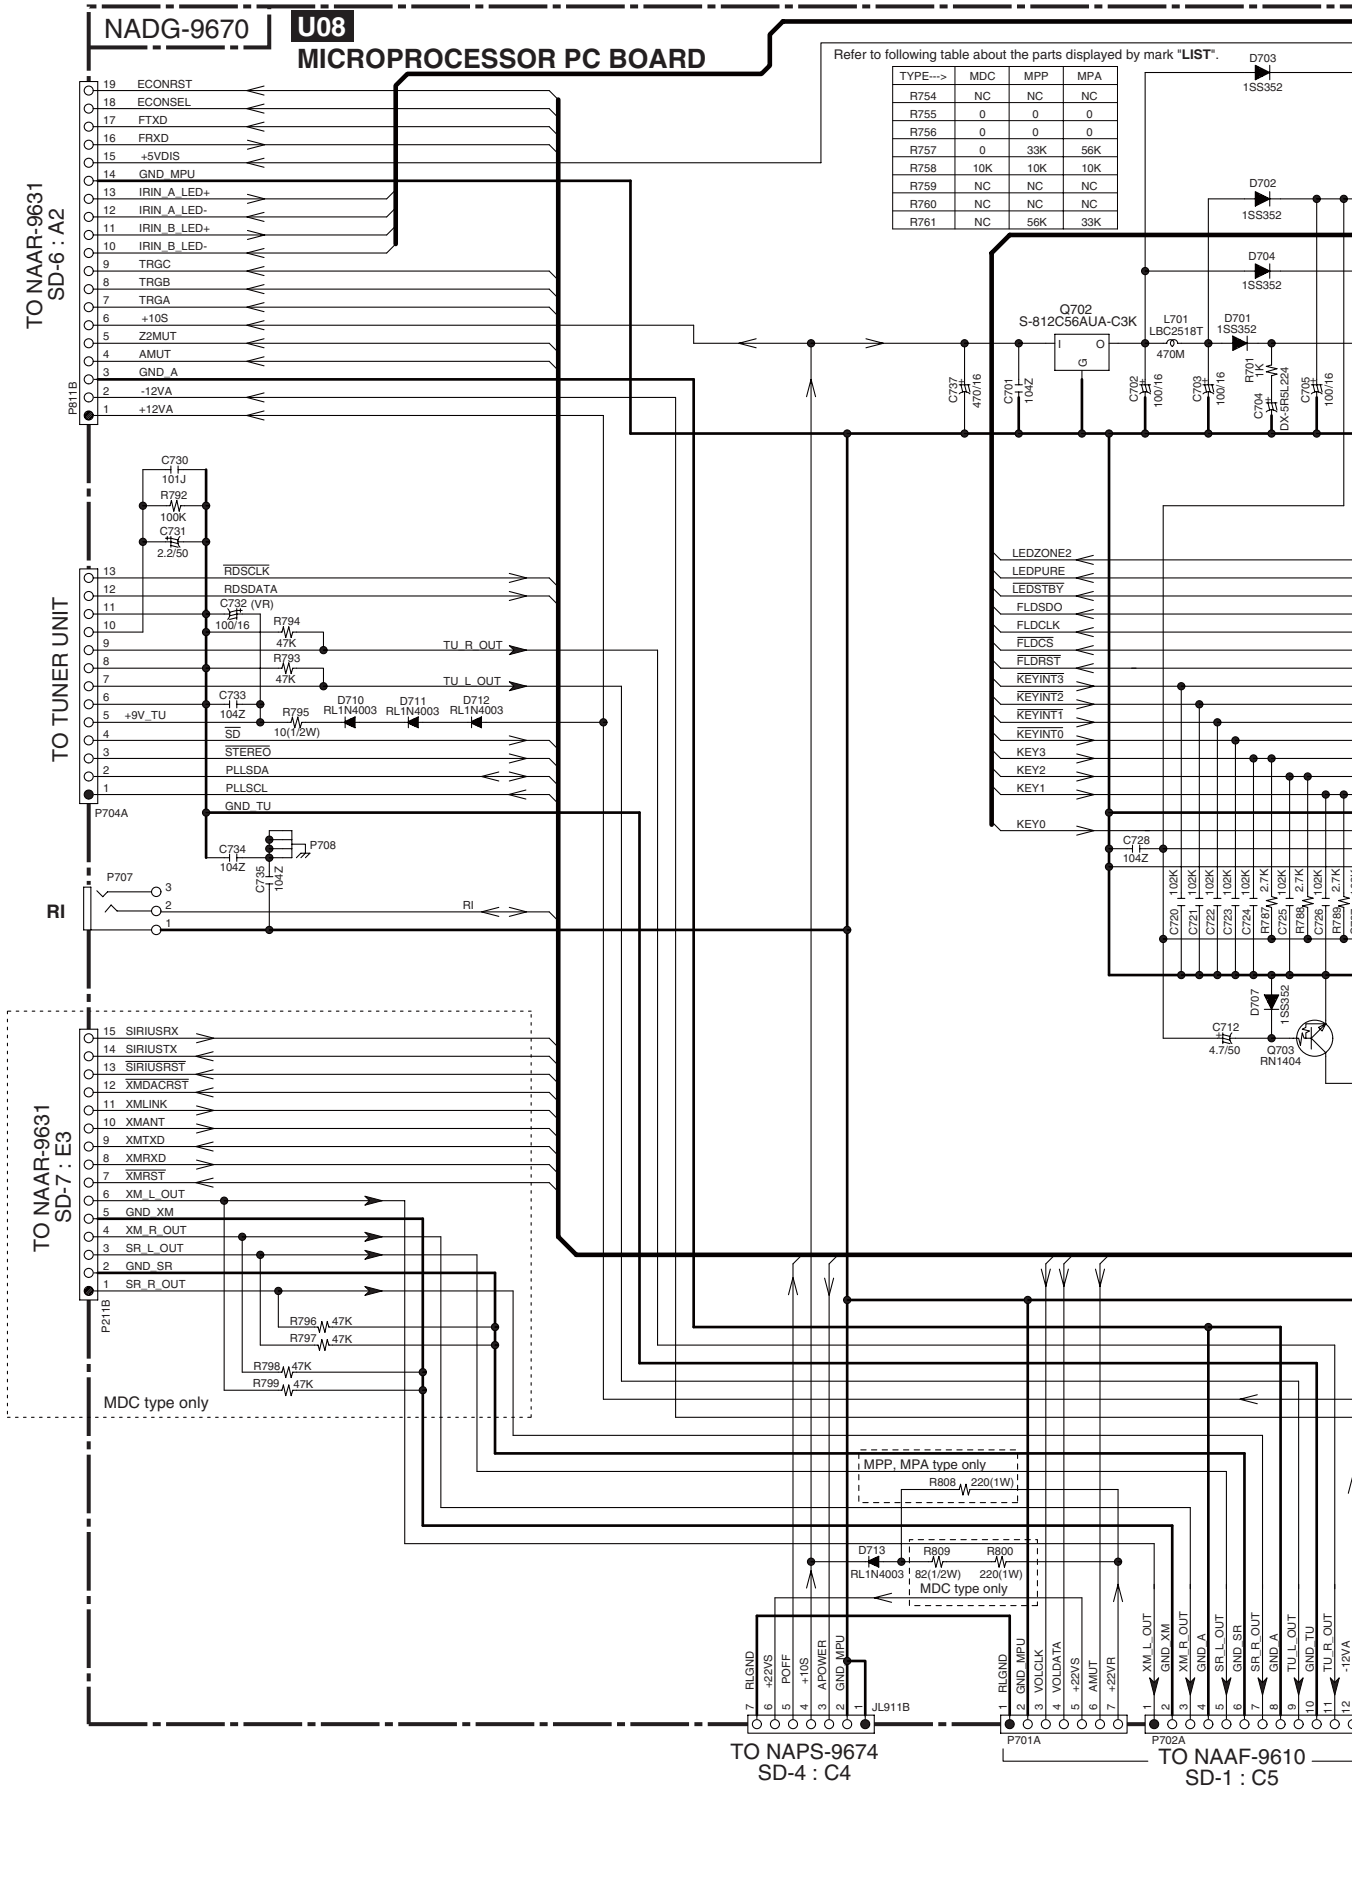

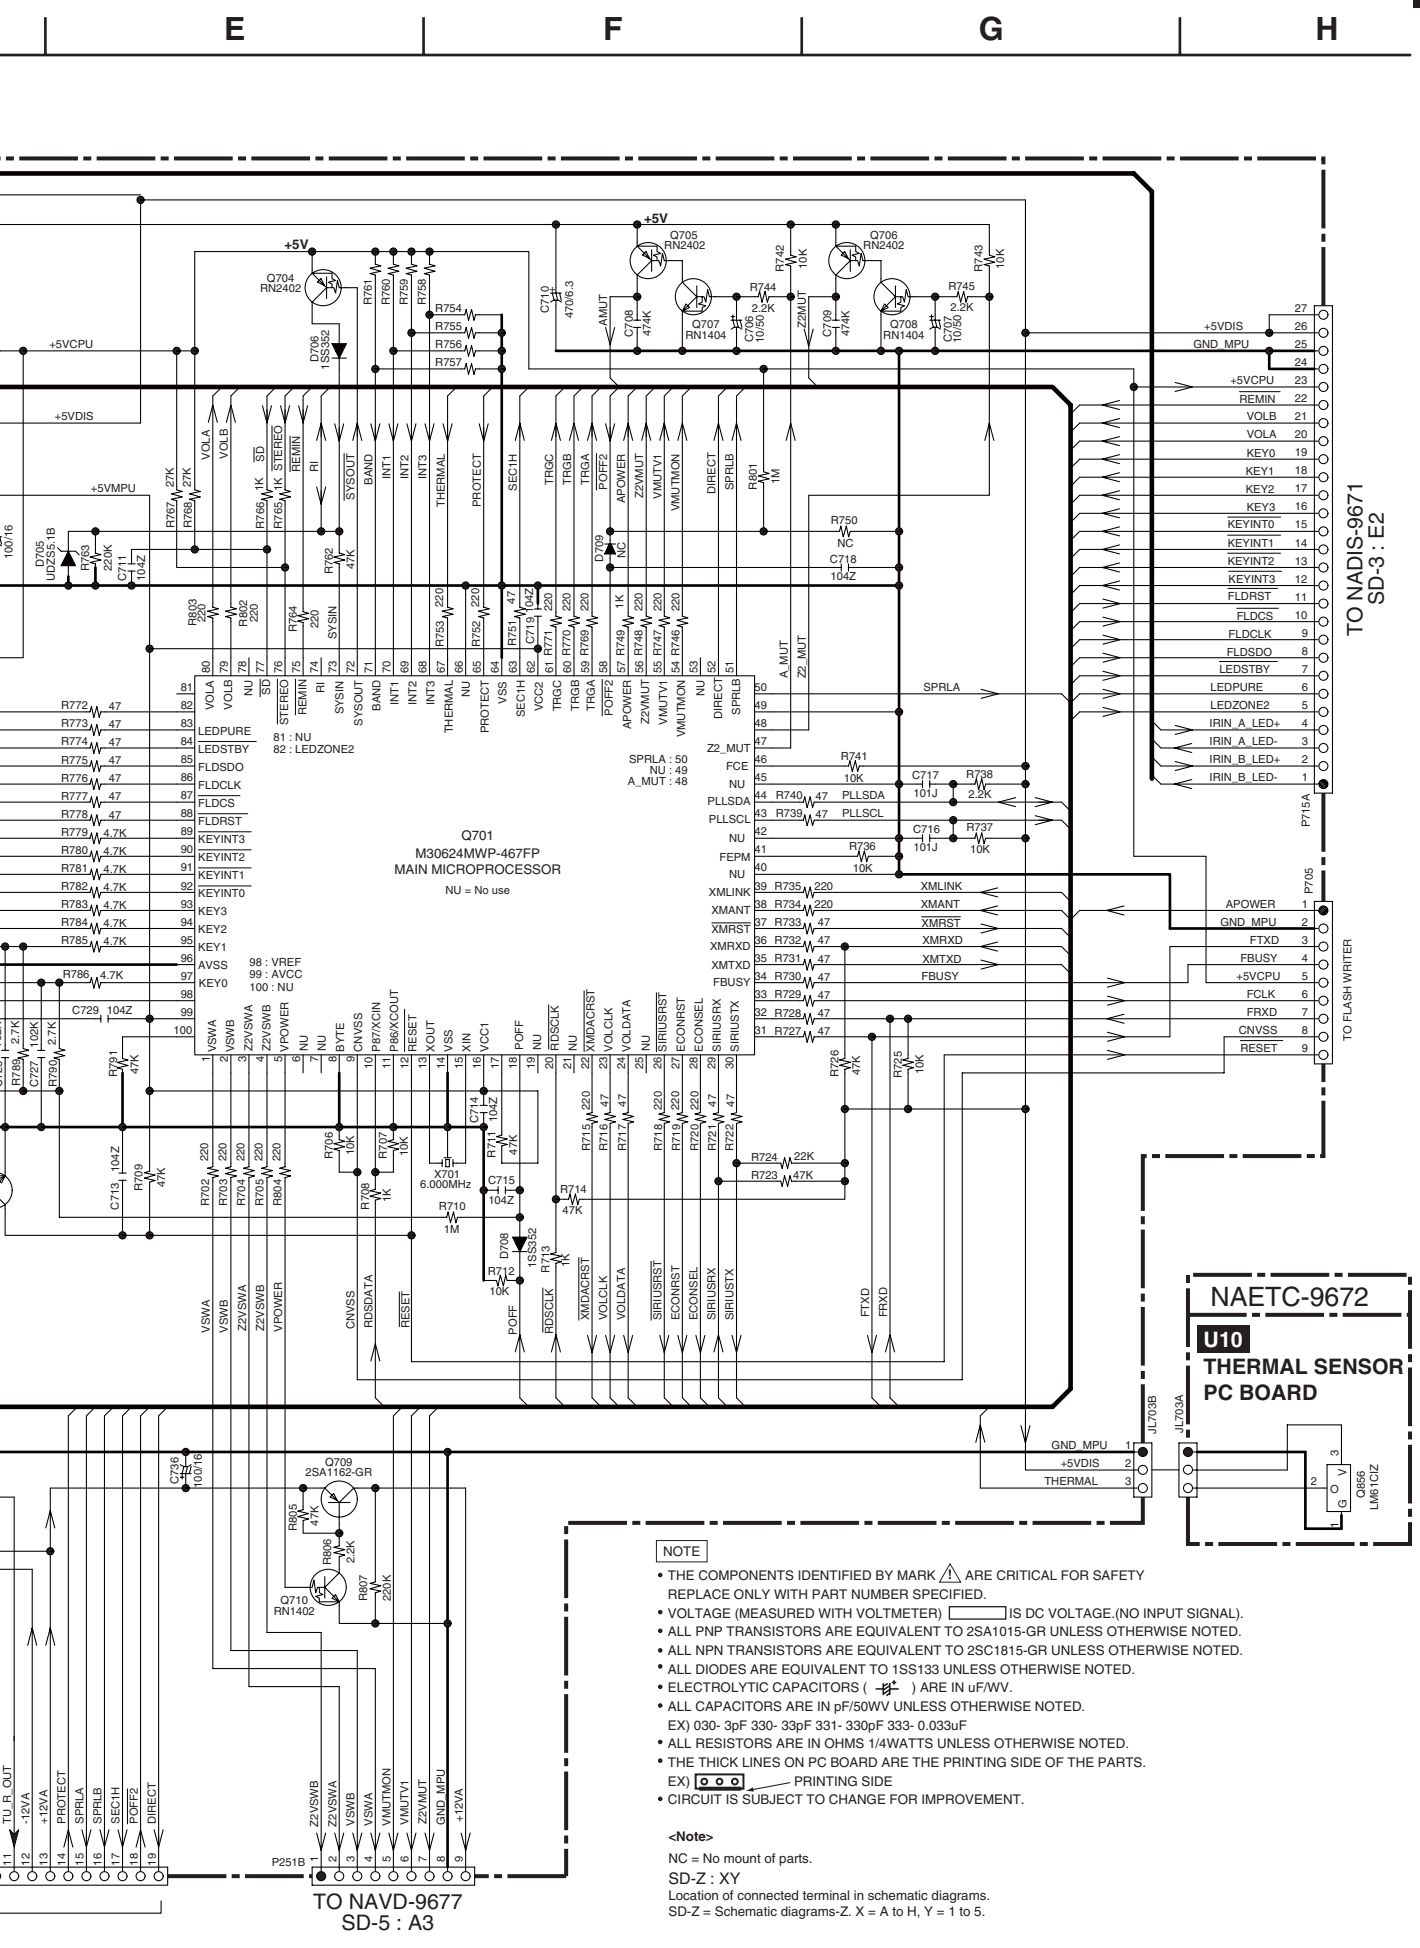

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) ▭ IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⊣⊢) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
  EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
  EX) ⊙⊙⊙ PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY
Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

SCHEMATIC DIAGRAMS-3(SD-3)

DISPLAY SECTION

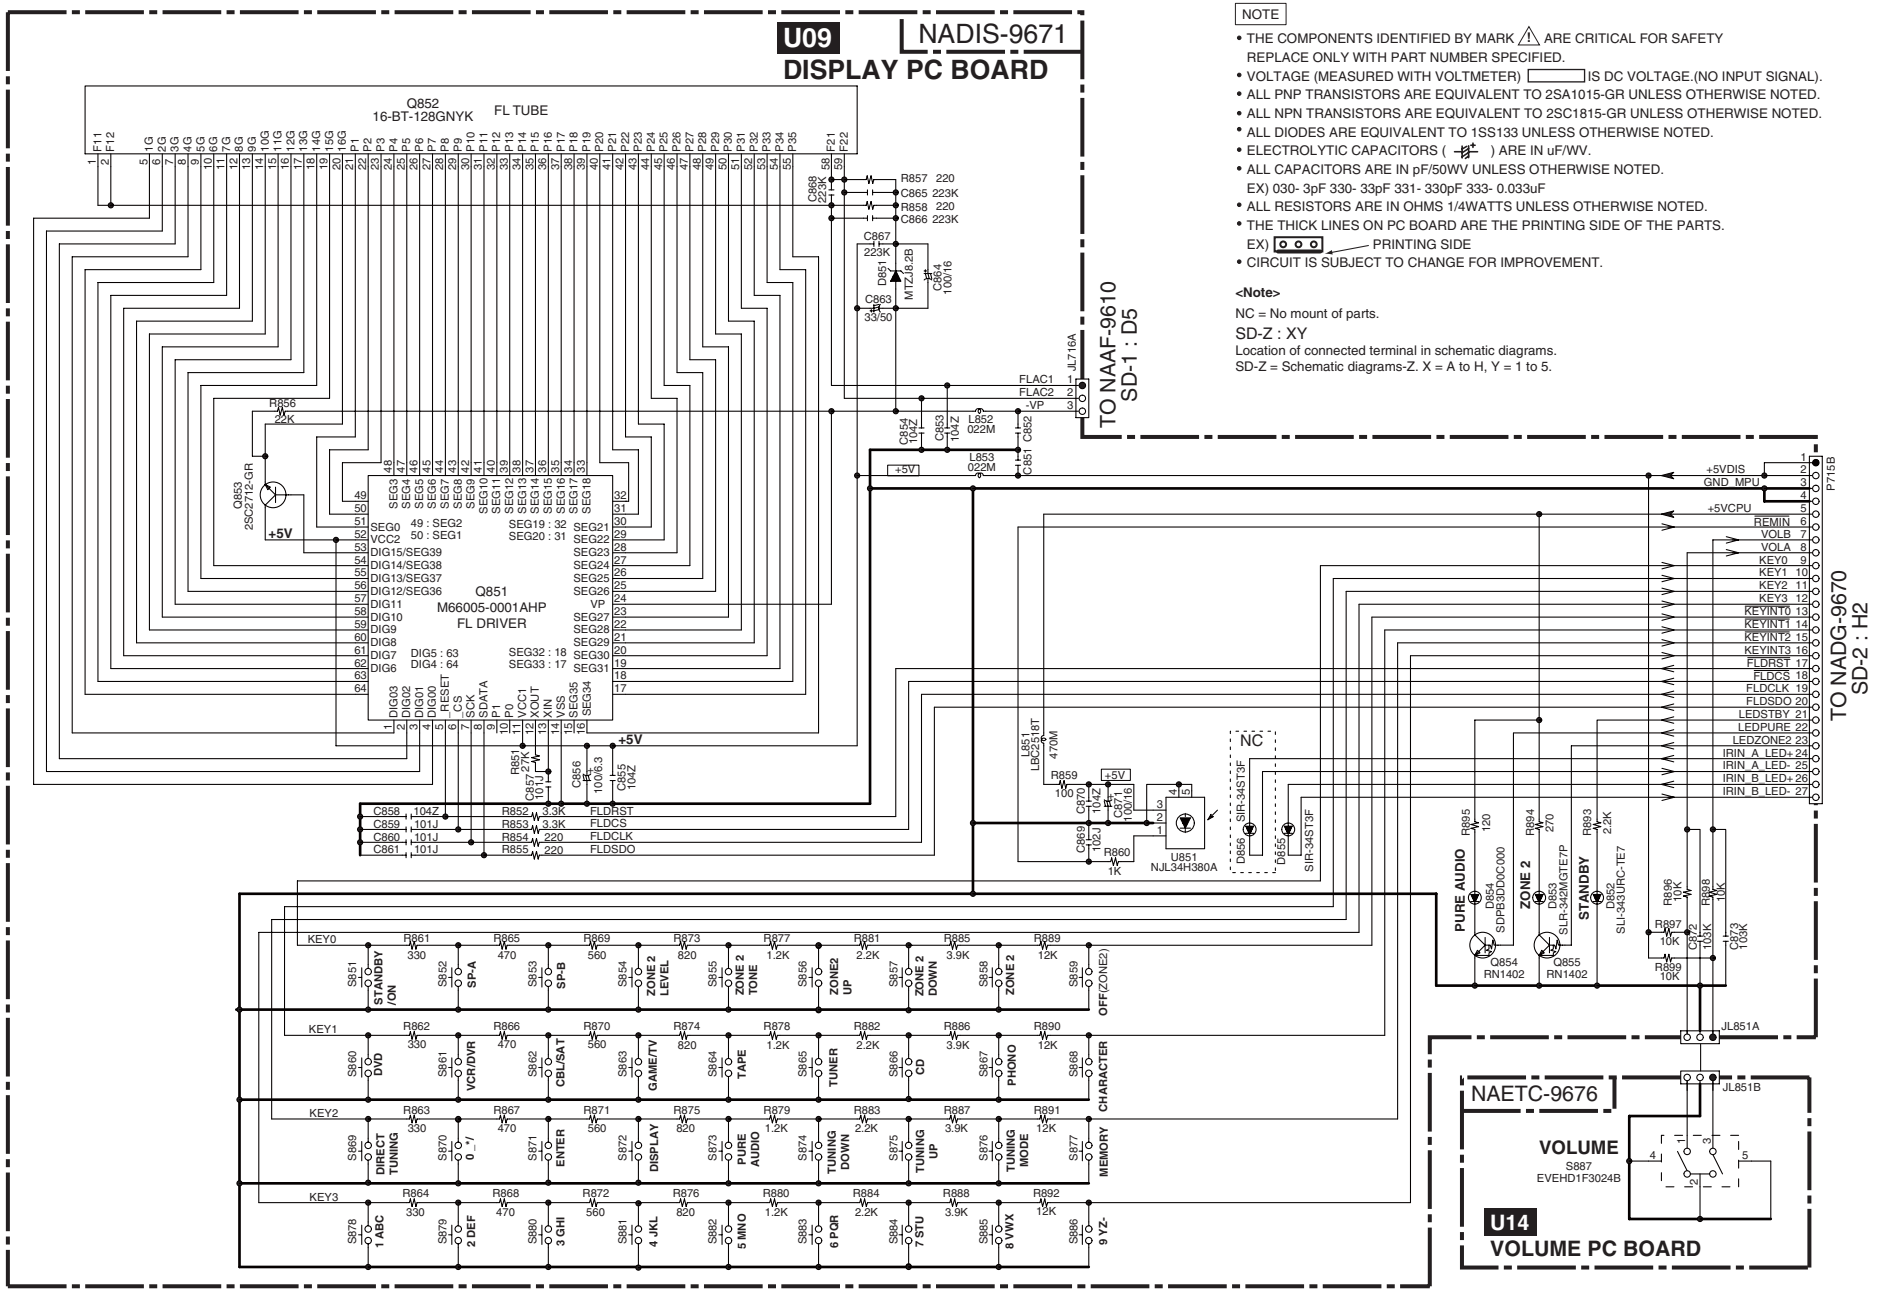

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) ▭ IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⏚) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
  EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
  EX) ⊙⊙⊙ PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY

Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

TX-8555

SCHEMATIC DIAGRAMS-4(SD-4)

POWER SUPPLY SECTION

Refer to following table about the parts displayed by mark "**LIST**".

MODEL--->	TX-8555	
TYPE--->	MDD	MPP, MPA
T901	NPT-1575D	NPT-1575P
T902	NPT-1520JQ	NPT-1520GQ
F901	6A125V	NONE
F902	NONE	T2.5AL250V
F903	5A125V	T2.5AL250V
J904	YES	NONE
J905	NONE	NONE
J907	YES	YES
J918	NONE	YES
J930	NONE	YES

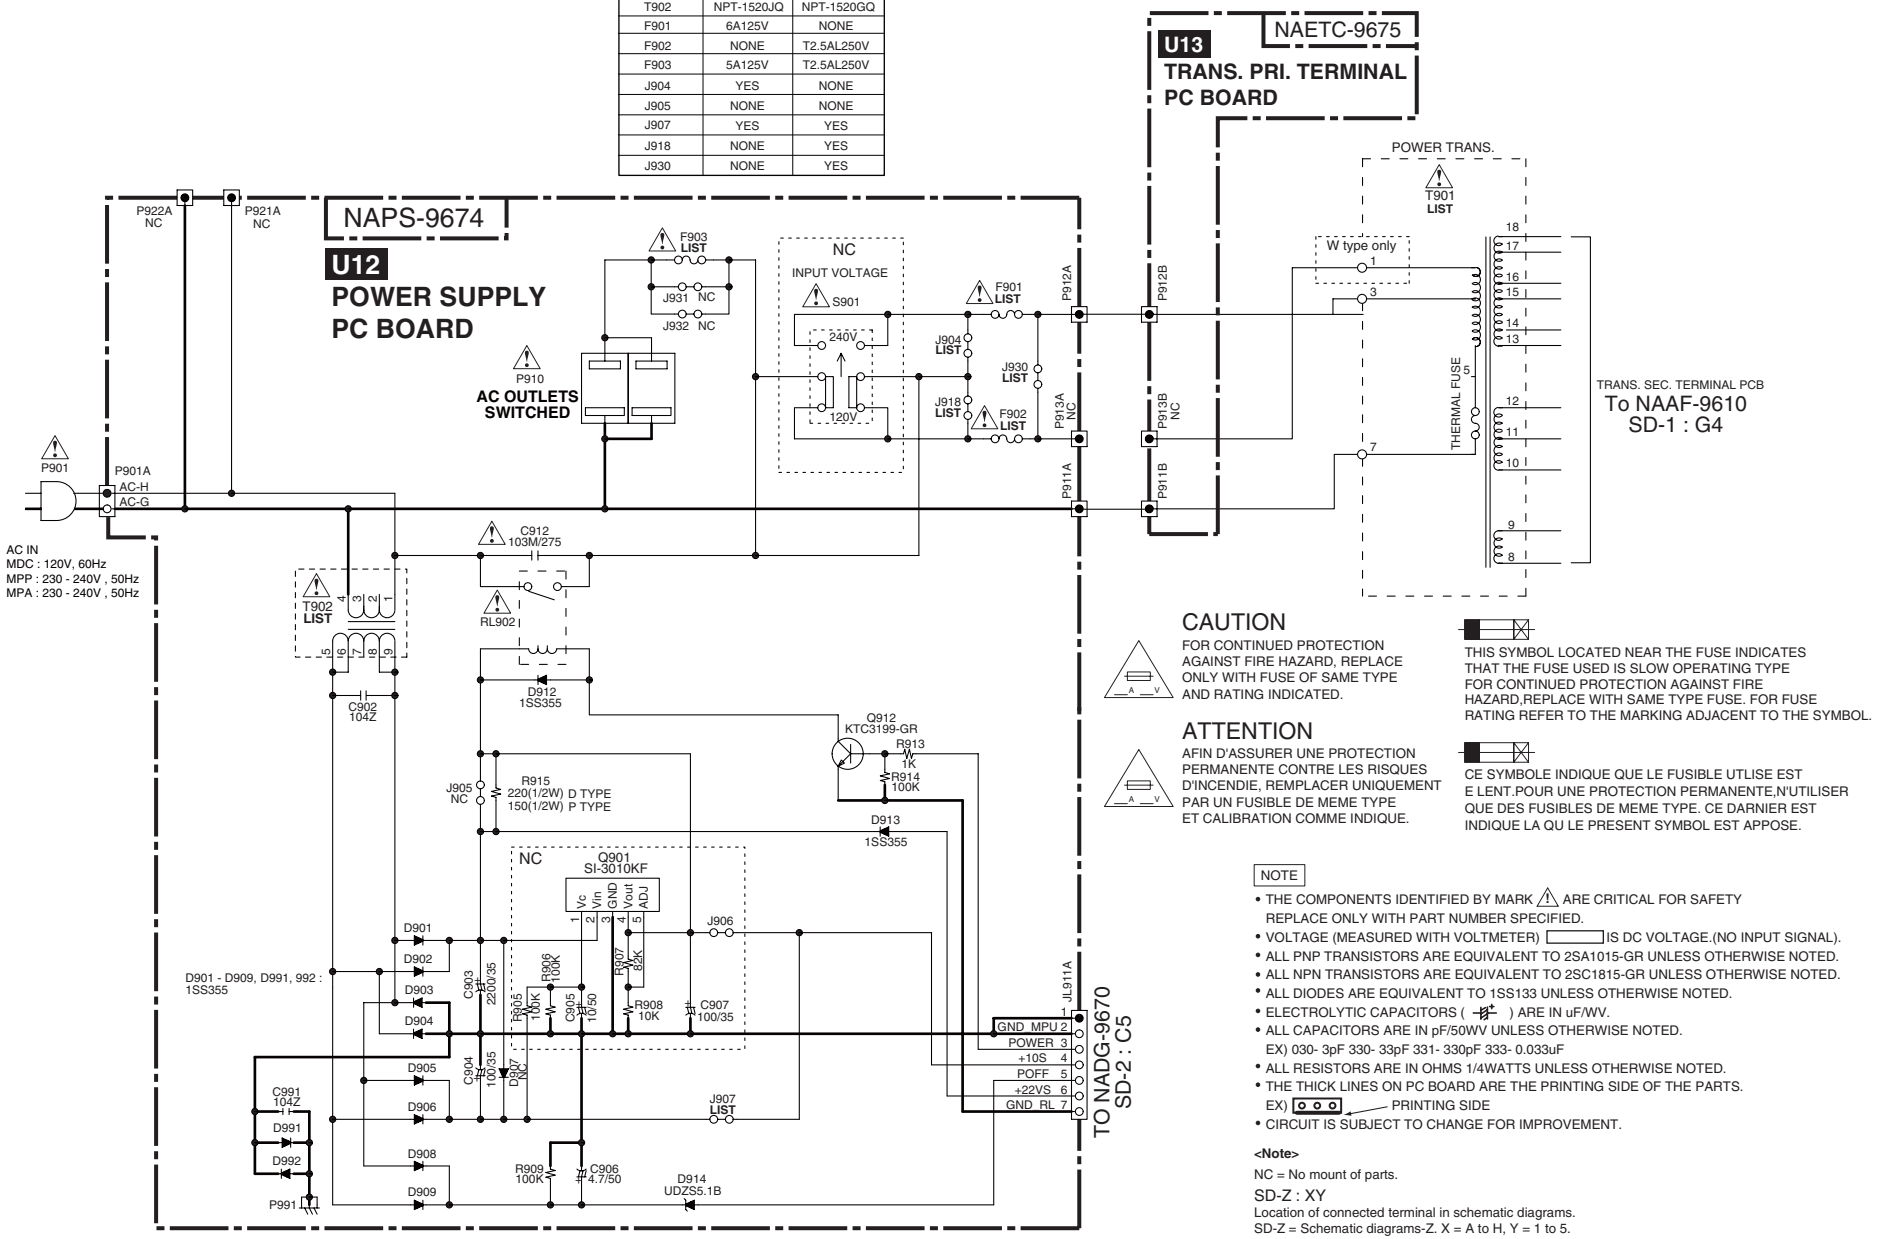

CAUTION

FOR CONTINUED PROTECTION AGAINST FIRE HAZARD, REPLACE ONLY WITH FUSE OF SAME TYPE AND RATING INDICATED.

THIS SYMBOL LOCATED NEAR THE FUSE INDICATES THAT THE FUSE USED IS SLOW OPERATING TYPE FOR CONTINUED PROTECTION AGAINST FIRE HAZARD,REPLACE WITH SAME TYPE FUSE. FOR FUSE RATING REFER TO THE MARKING ADJACENT TO THE SYMBOL.

ATTENTION

AFIN D'ASSURER UNE PROTECTION PERMANENTE CONTRE LES RISQUES D'INCENDIE, REMPLACER UNIQUEMENT PAR UN FUSIBLE DE MEME TYPE ET CALIBRATION COMME INDIQUE.

CE SYMBOLE INDIQUE QUE LE FUSIBLE UTLISE EST E LENT.POUR UNE PROTECTION PERMANENTE,N'UTILISER QUE DES FUSIBLES DE MEME TYPE. CE DARNIER EST INDIQUE LA QU LE PRESENT SYMBOL EST APPOSE.

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) ▭ IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⧾) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
  EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
  EX) ▭ ← PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY

Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

TX-8555

SCHEMATIC DIAGRAMS-5(SD-5)

VIDEO SECTION

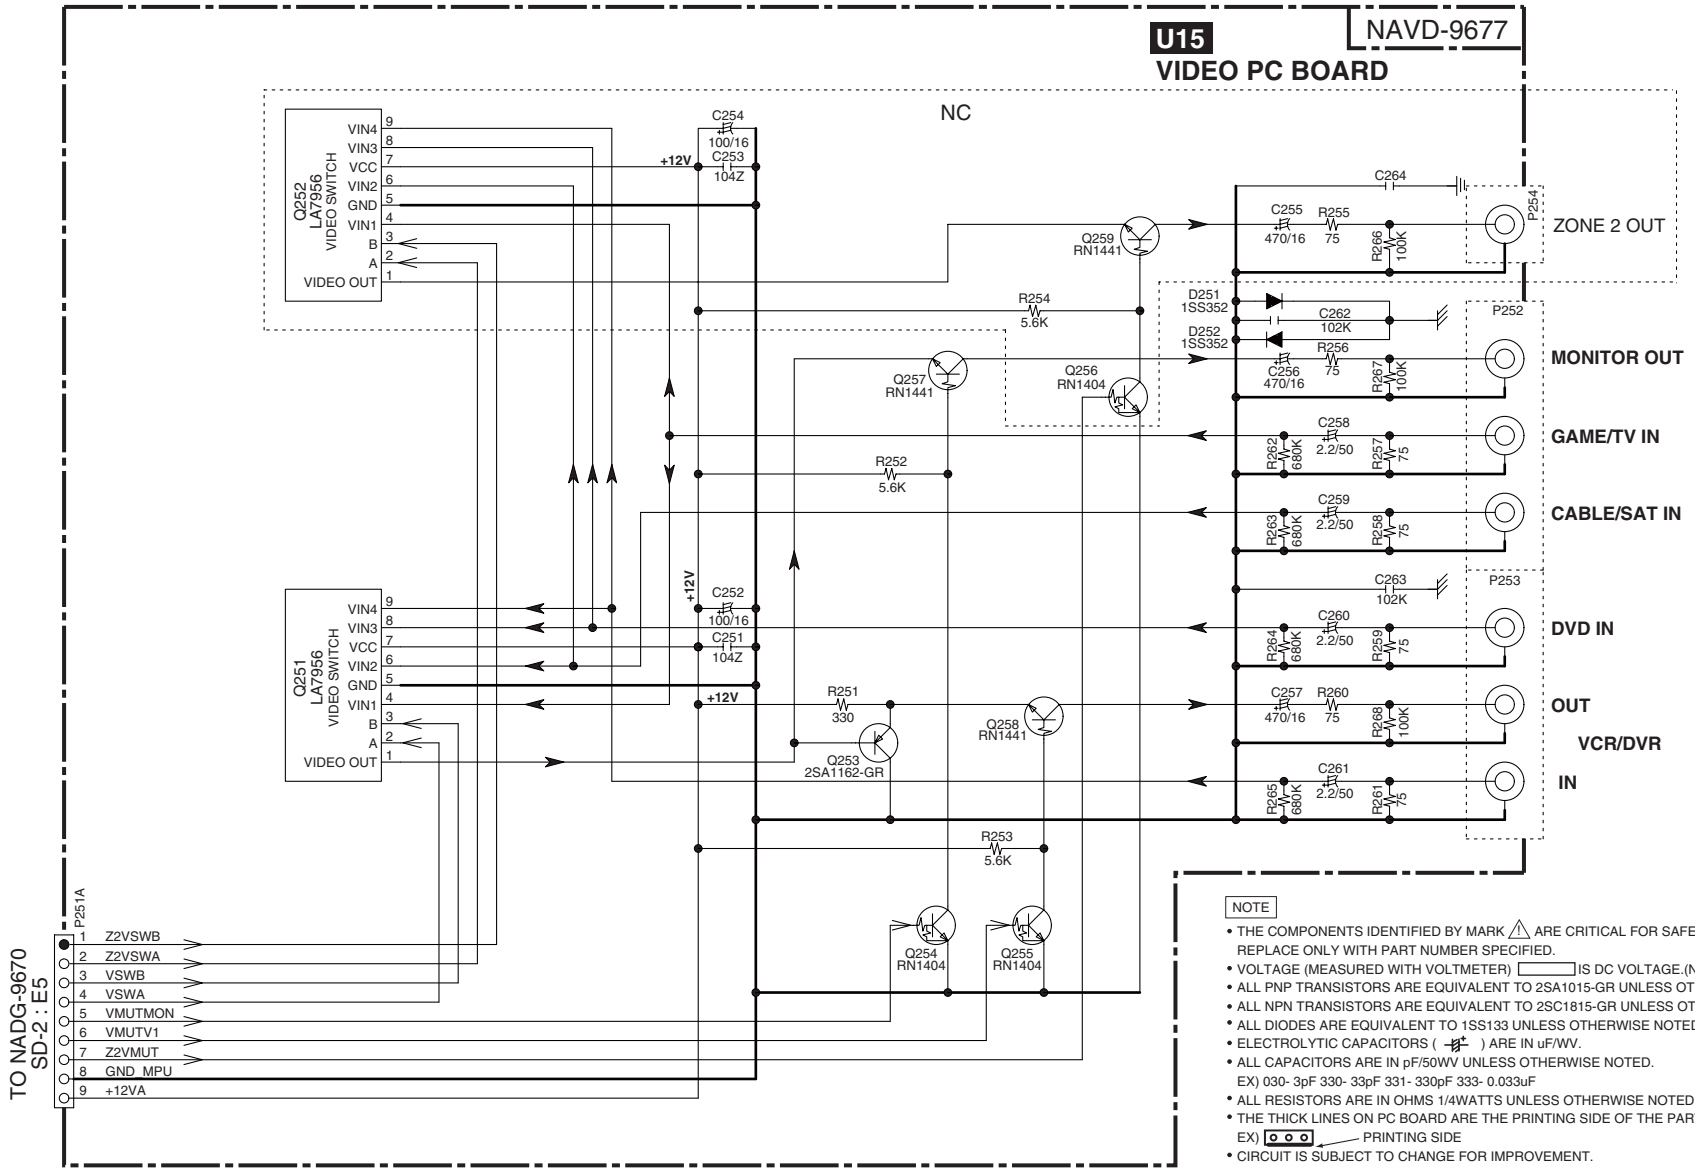

NOTE

- THE COMPONENTS IDENTIFIED BY MARK ⚠ ARE CRITICAL FOR SAFETY REPLACE ONLY WITH PART NUMBER SPECIFIED.
- VOLTAGE (MEASURED WITH VOLTMETER) ▭ IS DC VOLTAGE.(NO INPUT SIGNAL).
- ALL PNP TRANSISTORS ARE EQUIVALENT TO 2SA1015-GR UNLESS OTHERWISE NOTED.
- ALL NPN TRANSISTORS ARE EQUIVALENT TO 2SC1815-GR UNLESS OTHERWISE NOTED.
- ALL DIODES ARE EQUIVALENT TO 1SS133 UNLESS OTHERWISE NOTED.
- ELECTROLYTIC CAPACITORS (⊣⊢) ARE IN uF/WV.
- ALL CAPACITORS ARE IN pF/50WV UNLESS OTHERWISE NOTED.
  EX) 030- 3pF 330- 33pF 331- 330pF 333- 0.033uF
- ALL RESISTORS ARE IN OHMS 1/4WATTS UNLESS OTHERWISE NOTED.
- THE THICK LINES ON PC BOARD ARE THE PRINTING SIDE OF THE PARTS.
  EX) ooo PRINTING SIDE
- CIRCUIT IS SUBJECT TO CHANGE FOR IMPROVEMENT.

<Note>

NC = No mount of parts.

SD-Z : XY

Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

TX-8555

SCHEMATIC DIAGRAMS-6(SD-6)

ZONE 2 SECTION

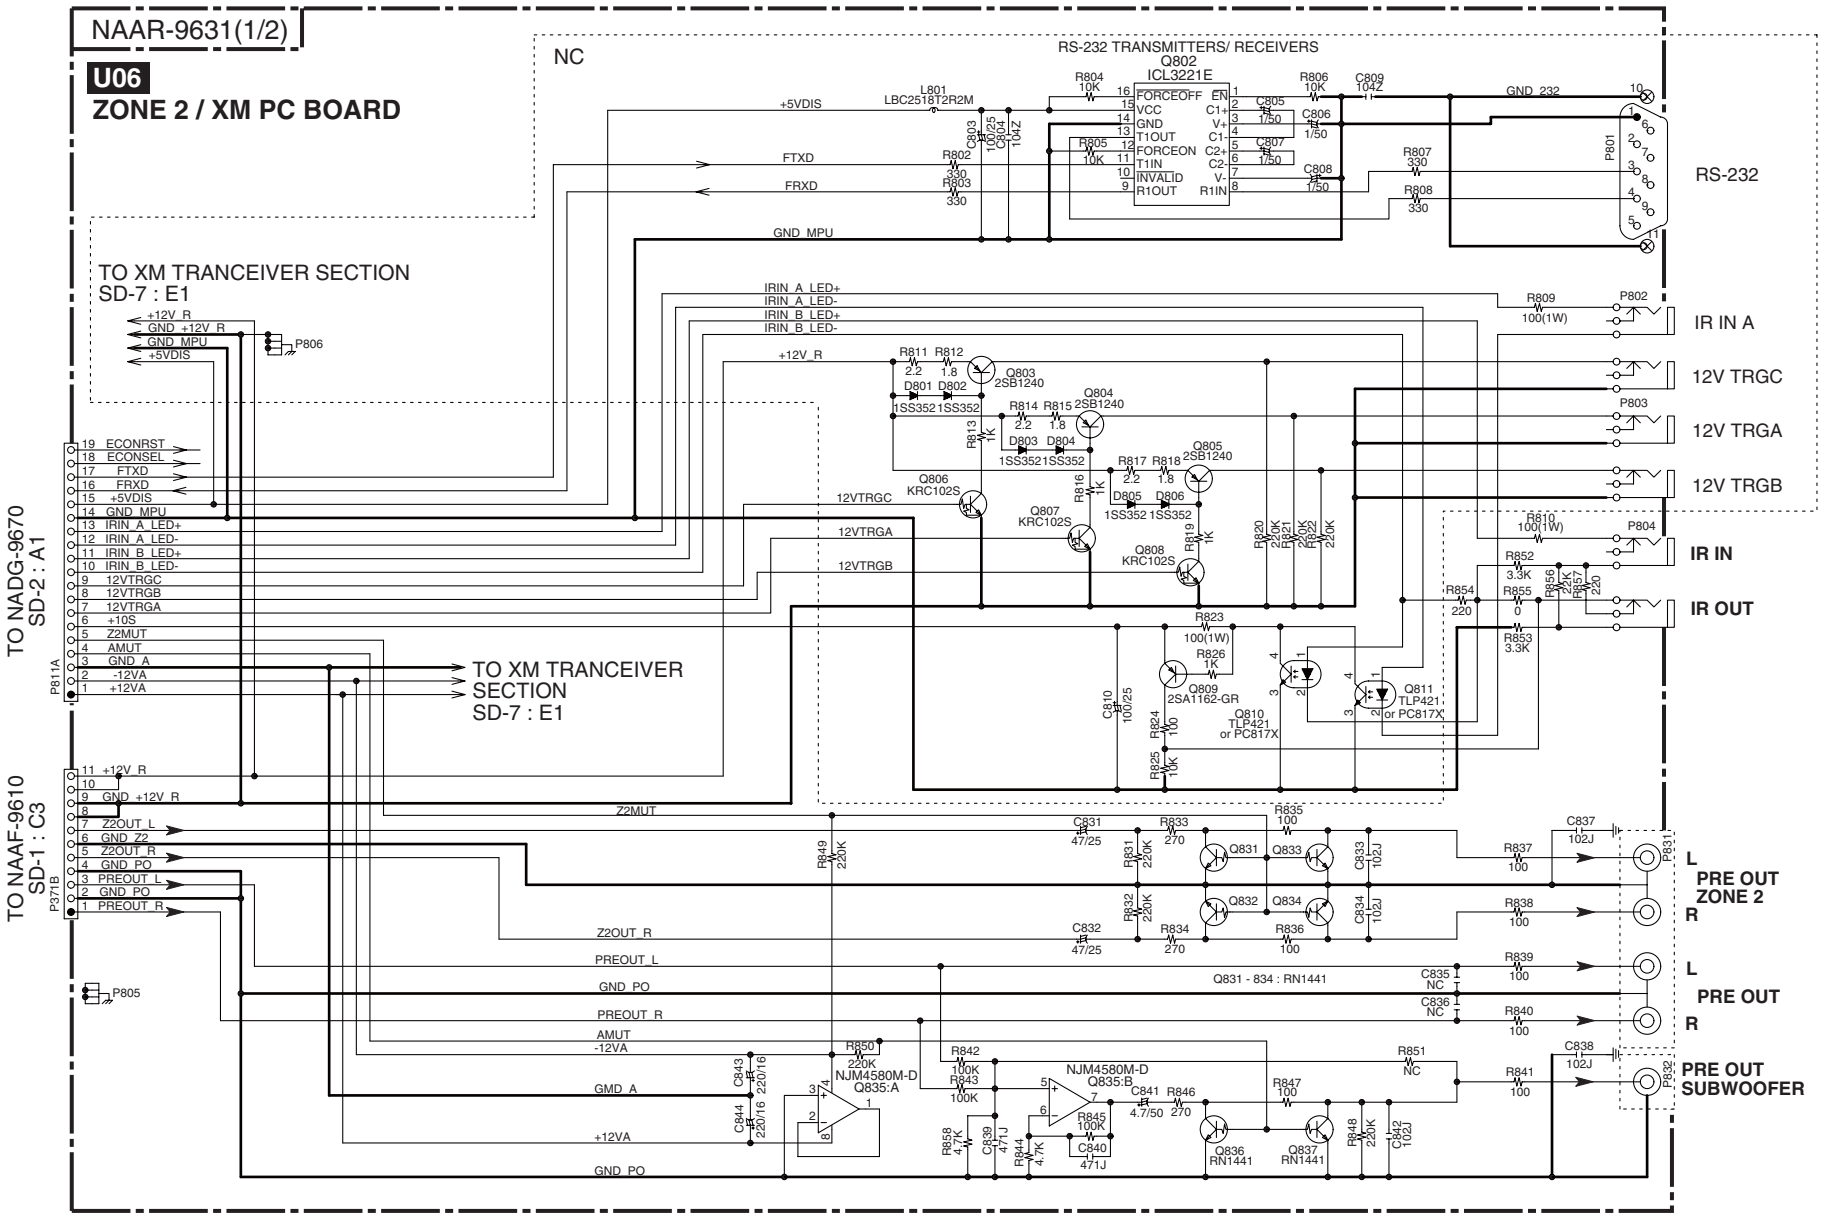

TX-8555

SCHEMATIC DIAGRAMS-7(SD-7)

XM TRANCEIVER SECTION

<Note>
NC = No mount of parts.
SD-Z : XY
Location of connected terminal in schematic diagrams.
SD-Z = Schematic diagrams-Z. X = A to H, Y = 1 to 5.

NAAR-9631(2/2)

U06
ZONE 2 / XM PC BOARD

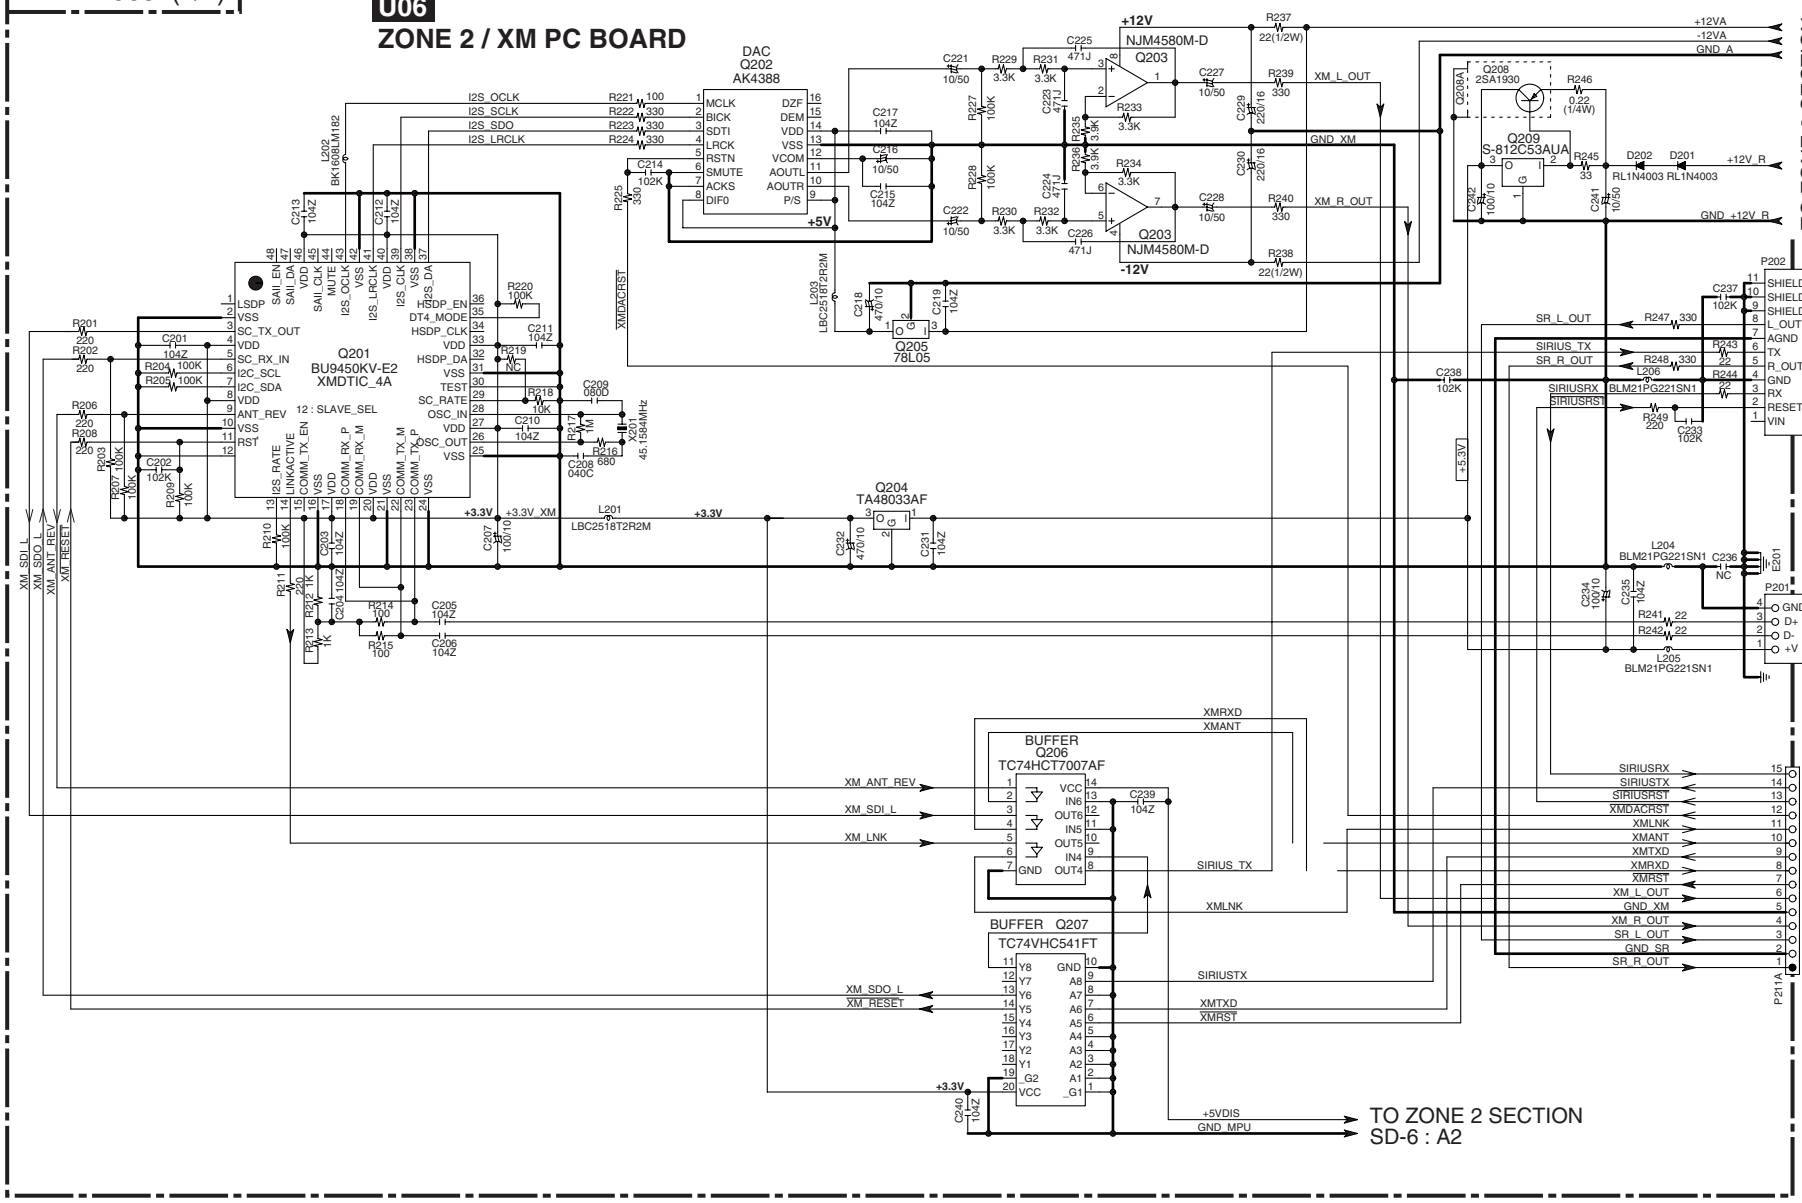

PACKING PROCEDURE

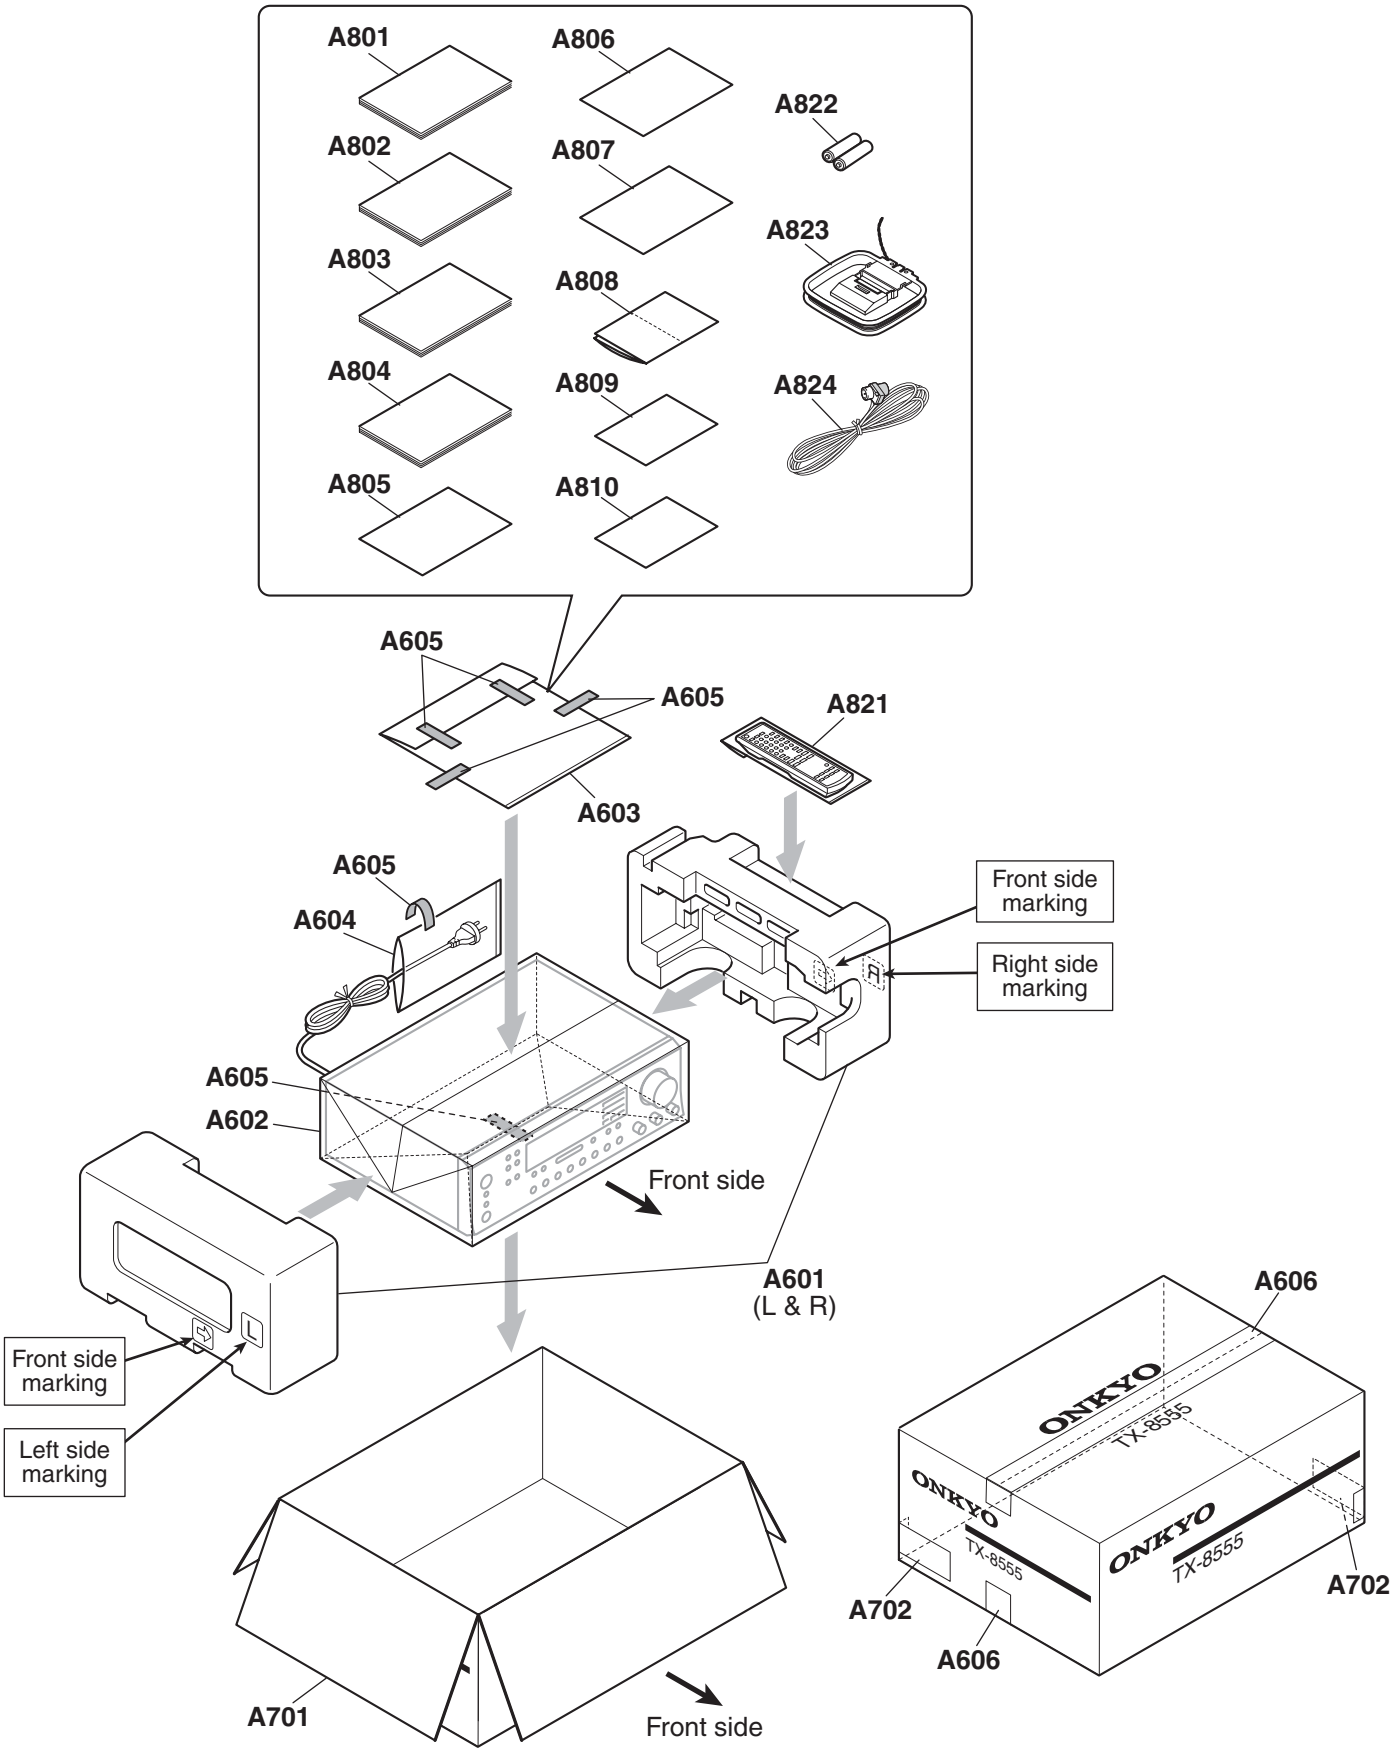

TX-8555

<Note>

Parts marked by "**NSP**" are generally unavailable because they are not in our Master Spare Parts List.

NOTE : THE COMPONENTS IDENTIFIED BY THE MARK ! ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

<Notes>

(B) : Black model

(S) : Silver model

<MDC> : Canadian model

<MPA> : Australian model

<MPP> : European model

EXPLODED VIEW PARTS LIST

	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
EV	A001	CHASSIS	TX8555	1	---	NSP
EV	A003	HOLDER	KGLS-16RT	1	27190511	
EV	A005	HOLDER	KGPS-16RF	1	27190991	
EV	A007	HOLDER	KGLS-12RT	1	27190266	
EV	A008	HOLDER	KGLS-22S	1	27190369	
EV	A009	LEG	AS	4	27175425	
EV	A011	SCREW	3TTB+8B(3BC)	4	838430088GR	
EV	A013	F BRACKET	AS(B)	1	27111516A	(B)
EV	A013	F BRACKET	AS(S)	1	27111517A	(S)
EV	A015	SCREW	3TTB+8B(3CM)SR	15	801637	
EV	A017	SCREW	3TTB+8B(3CM)SR	5	801637	
EV	A019	SCREW	4TTC+8C(3BC)	4	830440089GR	
EV	A020	SPACER	---	1	27270439	
EV	A021	HEAT SINK	233	1	27160594	
EV	A023	RETAINER	(HS-2)	3	27141530A	
EV	A025	SCREW	3TTB+8B(3CM)SR	6	801637	

EV	A027	RETAINER	RETAINER	1	27141671	
EV	A029	SCREW	3TTB+8B(3CM)SR	3	801637	
EV	A031	SCREW	3SMS8W.SW+14B(CU)	6	801634	
EV	A033	SCREW	3TTB+8B(3CM)SR	1	801637	
EV	A035	SCREW	3TTB+8B(3CM)SR	9	801637	
EV	A037	CUSHION	T4L20D10	2	28141566	
EV	A039	KNOB	VOLAS(B)	1	28326654	(B)
EV	A039	KNOB	VOLAS(S)	1	28326655	(S)
EV	A040	CUSHION	---	2	28141603-1	
EV	A043	KNOB	(TONE)	3	28325454	(B)
EV	A043	KNOB	(TONE)	3	28326350	(S)
EV	A045	B PLATE	---	1	28133425	(B)
EV	A045	B PLATE	---	1	28133426	(S)
EV	A047	GUIDE	AS(B)	1	27268216A	(B)
EV	A047	GUIDE	AS(S)	1	27268217A	(S)
EV	A201	COVER	(B) (Bent)	1	28184964A	(B)
EV	A201	COVER	(S) (Bent)	1	28184965	(S)
EV	A201	COVER	(B) (Not bent)	1	28184964AZ	(B) <MDC>
EV	A202	REAR PANEL	85DC	1	27123869	<MDC>
EV	A202	REAR PANEL	85PA	1	27123871	<MPA>
EV	A202	REAR PANEL	85PP	1	27123870	<MPP>
EV	A203	SCREW	3TTB+8B(3BC)	6	838430088GR	(B)
EV	A203	SCREW	3TTB+8B(3CM)SR	6	801637	(S)
EV	A204	IB CUSHION	W15 x 3t TAPE	1	28141585	
EV	A205	SCREW	3TTB+8B(3BC)	24	838430088GR	
EV	A206	SCREW	3P+6FN(3BC)	1	82143006GR	(B) <MDC>
EV	A207	WASHER	W3 x 10F(3BC)	1	87643010GR	
EV	A209	TAPE	TAPE(CLOTH-8U)	(1)	29110082	
EV	A208	SCREW	3TTB+8B(3CM)SR	1	801637	
EV	A210	BUSHING	S-RELIEF #2271	1	27300750	!
EV	A211	LABEL	(COVER)	1	29364123	
EV	A212	F PANEL	(85BDC)	1	27213136	(B) <MDC>
EV	A212	F PANEL	8555MPA	1	27213170	(B) <MPA>

EV	A212	F PANEL	(85BPP)	1	27213137	(B) <MPP>
EV	A212	F PANEL	(85SPP)	1	27213138	(S) <MPP>
EV	A213	SCREW	3TTB+8B(3BC)	3	838430088GR	
EV	A214	BADGE	---	1	28135244	(B)
EV	A214	BADGE	---	1	28135298	(S)
EV	A215	CLEAR PLT	TX8555	1	28192211	
EV	A217	SPACER	---	2	27270472	
EV	A219	LABEL	HOOKUP-ONKYO	1	29363194	<MDC>
EV	A221	TAPE	TAPE(CLOTH-16U)	(1)	29110083	
EV	A301	CLIP	CS-1U	2	27255004	
EV	E801	WIRE TIE	BSK-1	6	260208	
EV	Q521	TR	2SC5200-O	1	2202823	!
EV	Q521 or	TR	2SC5200-R	(1)	2202822	!
EV	Q521A	ISO SHEET	AC262	4	223025	
EV	Q522	TR	2SC5200-O	1	2202823	!
EV	Q522 or	TR	2SC5200-R	(1)	2202822	!
EV	Q523	TR	2SA1943-O	1	2202813	!
EV	Q523 or	TR	2SA1943-R	(1)	2202812	!
EV	Q524	TR	2SA1943-O	1	2202813	!
EV	Q524 or	TR	2SA1943-R	(1)	2202812	!
EV	**<Note>**					
EV	Must use the same HFE rank mutually about the following parts.					
EV	Ref. No. : Q521 - 524					
EV	D911	DIODE	D10XB60H	1	22380337	!
EV	T901	P TRANS	NPT-1575D	1	2301943	!, <MDC>
EV	T901	P TRANS	NPT-1543P	1	2301868	!, <MPA>
EV	T901	P TRANS	NPT-1543P	1	2301868	!, <MPP>
EV	P501A	P RIVET	JB-407A-C	8	880052	<MPA>
EV	P501A	P RIVET	JB-407A-C	8	880052	<MPP>
EV	P704	FFC	NCFC7-131012	1	2047131012	
EV	P715	FFC	NCFC7-272012	1	2047272012	
EV	P901	AC CORD	AS-UC-2	1	253333VOL	!, <MDC>
EV	P901 or	AC CORD	AS-UC-2	(1)	253368BLTK	!, <MDC>

EV	P901 or	AC CORD	AS-UC-2	(1)	253368AYUN	!, <MDC>
EV	P901 or	AC CORD	AS-UC-2	(1)	253368HSN	!, <MDC>
EV	P901 or	AC CORD	AS-UC-2	(1)	253378VOL	!, <MDC>
EV	P901	AC CORD	AS-SAA	1	253390VOL	!, <MPA>
EV	P901 or	AC CORD	AS-SAA	(1)	253388LTK	!, <MPA>
EV	P901 or	AC CORD	AS-SAA	(1)	253388LON	!, <MPA>
EV	P901	AC CORD	AS-CEE-2	1	253306VOL	!, <MPP>
EV	P901 or	AC CORD	AS-CEE-2	(1)	253374YUN	!, <MPP>
EV	F901	FUSE	6A-UL/T-233	1	252327GR	!, <MDC>
EV	F901 or	FUSE	6A-T/UL-ST2	(1)	252259GR	!, <MDC>
EV	F902	FUSE	2.5A-SE-EAK FUSE	1	252075GR	!, <MPA>
EV	F902 or	FUSE	2.5A-SE-TL250V	(1)	252275GR	!, <MPA>
EV	F902	FUSE	2.5A-SE-EAK FUSE	1	252075GR	!, <MPP>
EV	F902 or	FUSE	2.5A-SE-TL250V	(1)	252275GR	!, <MPP>
EV	F903	FUSE	5A-UL/T-233	1	252326GR	!, <MDC>
EV	F903 or	FUSE	5A-T/UL-ST2	(1)	252258GR	!, <MDC>
EV	F903	FUSE	2.5A-SE-EAK FUSE	1	252075GR	!, <MPA>
EV	F903 or	FUSE	2.5A-SE-TL250V	(1)	252275GR	!, <MPA>
EV	F903	FUSE	2.5A-SE-EAK FUSE	1	252075GR	!, <MPP>
EV	F911	FUSE	8A-UL/T-233	1	252329GR	!, <MDC>
EV	F911 or	FUSE	8A-T/UL-ST2	(1)	252261GR	!, <MDC>
EV	F912	FUSE	8A-UL/T-233	1	252329GR	!, <MDC>
EV	F912 or	FUSE	8A-T/UL-ST2	(1)	252261GR	!, <MDC>
EV	F913	FUSE	3.15A-UL/T-233	1	252323GR	!, <MDC>
EV	F913 or	FUSE	3.15A-T/UL-ST2	(1)	252256GR	!, <MDC>
EV	U01	AMPLIFIER PC board ass'y	NAAF-9610-1C	1	1B226510-1C	<MDC>
EV	U01	AMPLIFIER PC board ass'y	NAAF-9610-1E	1	1B226510-1E	<MPA>
EV	U01	AMPLIFIER PC board ass'y	NAAF-9610-1D	1	1B226510-1D	<MPP>
EV	U02	RECTIFIER PC board ass'y	NAPS-9612-1C	1	1B226512-1C	<MDC>
EV	U02	RECTIFIER PC board ass'y	NAPS-9612-1E	1	1B226512-1E	<MPA>
EV	U02	RECTIFIER PC board ass'y	NAPS-9612-1D	1	1B226512-1D	<MPP>
EV	U03	HOLDER PC board	NAETC-9613-1C	1	---	NSP, <MDC>
EV	U03	HOLDER PC board	NAETC-9613-1E	1	---	NSP, <MPA>

EV	U03	HOLDER PC board	NAETC-9613-1D	1	---	NSP, <MPP>
EV	U04	TRANS. SEC. TERMINAL PC board ass'y	NAPS-9614-1C	1	1B226514-1C	<MDC>
EV	U04	TRANS. SEC. TERMINAL PC board ass'y	NAPS-9614-1E	1	1B226514-1E	<MPA>
EV	U04	TRANS. SEC. TERMINAL PC board ass'y	NAPS-9614-1D	1	1B226514-1D	<MPP>
EV	U05	TONE CONTROL PC board ass'y	NAAF-9616-1C	1	1B226515-1C	<MDC>
EV	U05	TONE CONTROL PC board ass'y	NAAF-9616-1E	1	1B226515-1E	<MPA>
EV	U05	TONE CONTROL PC board ass'y	NAAF-9616-1D	1	1B226515-1D	<MPP>
EV	U06	ZONE 2 / IR PC board ass'y	NAAR-9631-1C	1	1B226531-1C	<MDC>
EV	U06	ZONE 2 / IR PC board ass'y	NAAR-9631-1E	1	1B226531-1E	<MPA>
EV	U06	ZONE 2 / IR PC board ass'y	NAAR-9631-1D	1	1B226531-1D	<MPP>
EV	U08	MICROPROCESSOR PC board ass'y	NADG-9670-1A	1	1B226570-1A	<MDC>
EV	U08	MICROPROCESSOR PC board ass'y	NADG-9670-1C	1	1B226570-1C	<MPA>
EV	U08	MICROPROCESSOR PC board ass'y	NADG-9670-1B	1	1B226570-1B	<MPP>
EV	U09	DISPLAY PC board ass'y	NADIS-9671-1A	1	1B226571-1A	<MDC>
EV	U09	DISPLAY PC board ass'y	NADIS-9671-1C	1	1B226571-1C	<MPA>
EV	U09	DISPLAY PC board ass'y	NADIS-9671-1B	1	1B226571-1B	<MPP>
EV	U10	THERMAL SENSOR PC board ass'y	NAETC-9672-1A	1	---	NSP, <MDC>
EV	U10	THERMAL SENSOR PC board ass'y	NAETC-9672-1C	1	---	NSP, <MPA>
EV	U10	THERMAL SENSOR PC board ass'y	NAETC-9672-1B	1	---	NSP, <MPP>
EV	U11	HOLDER PC board	NAETC-9673-1A	1	---	NSP, <MDC>
EV	U11	HOLDER PC board	NAETC-9673-1C	1	---	NSP, <MPA>
EV	U11	HOLDER PC board	NAETC-9673-1B	1	---	NSP, <MPP>
EV	U12	POWER SUPPLY PC board ass'y	NAPS-9674-1A	1	1B226574-1A	<MDC>
EV	U12	POWER SUPPLY PC board ass'y	NAPS-9674-1C	1	1B226574-1C	<MPA>
EV	U12	POWER SUPPLY PC board ass'y	NAPS-9674-1B	1	1B226574-1B	<MPP>
EV	U13	TRANS. PRI. TRMINAL PC board ass'y	NAETC-9675-1A	1	---	NSP, <MDC>
EV	U13	TRANS. PRI. TRMINAL PC board ass'y	NAETC-9675-1C	1	---	NSP, <MPA>
EV	U13	TRANS. PRI. TRMINAL PC board ass'y	NAETC-9675-1B	1	---	NSP, <MPP>
EV	U14	VOLUME PC board ass'y	NAETC-9676-1A	1	1B266576-1A	<MDC>
EV	U14	VOLUME PC board ass'y	NAETC-9676-1C	1	1B266576-1C	<MPA>
EV	U14	VOLUME PC board ass'y	NAETC-9676-1B	1	1B266576-1B	<MPP>
EV	U15	VIDEO PC board ass'y	NAVD-9677-1A	1	1B266577-1A	<MDC>
EV	U15	VIDEO PC board ass'y	NAVD-9677-1C	1	1B266577-1C	<MPA>

EV	U15	VIDEO PC board ass'y	NAVD-9677-1B	1	1B266577-1B	<MPP>
EV	U16	HEADPHONE JACK PC board ass'y	NAETC-9678-1A	1	---	NSP, <MDC>
EV	U16	HEADPHONE JACK PC board ass'y	NAETC-9678-1C	1	---	NSP, <MPA>
EV	U16	HEADPHONE JACK PC board ass'y	NAETC-9678-1B	1	---	NSP, <MPP>
EV	U17	HOLDER PC board	NAETC-9679-1A	1	---	NSP, <MDC>
EV	U17	HOLDER PC board	NAETC-9679-1C	1	---	NSP, <MPA>
EV	U17	HOLDER PC board	NAETC-9679-1B	1	---	NSP, <MPP>
EV	U18	TUNER UNIT	ENG06507QFUS	1	240156	<MDC>
EV	U18 or	TUNER UNIT	FAE385-A11US	(1)	240152	<MDC>
EV	U18 or	TUNER UNIT	ENG07506QFEX	1	240159	<MPA>
EV	U18 or	TUNER UNIT	FAE485-E12EX	(1)	240155	<MPA>
EV	U18	TUNER UNIT	FAE485-E11EU	1	240154	<MPP>
EV	U18 or	TUNER UNIT	ENG07505QFEU	(1)	240158	<MPP>

TX-8555

PC BOARD PARTS LIST

PCB1 **U01** AMPLIFIER PC BOARD (NAAF-9610-1C/ 1E/ 1D)
PCB1 **U02** RECTIFIER PC BOARD (NAPS-9612-1C/ 1E/ 1D)
PCB1 **U04** TRANS. SEC. TERMINAL PC BOARD (NAPS-9614-1C/ 1E/ 1D)
PCB1 **U05** TONE CONTROL PC BOARD (NAAF-9616-1C/ 1E/ 1D)
PCB1

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB1	Q301	IC	NJM4558D-X	1	222502	
PCB1	Q302	IC	R2S15211FP	1	22242297R3	
PCB1	Q361	TR	2SC1815-GR	1	2211255T	
PCB1	Q362	TR	2SA1015-GR	1	2211455T	
PCB1	Q401	IC	NJM2068L-D	1	22240250	
PCB1	Q403	IC	NJM2068L-D	1	22240250	
PCB1	Q452	TR	DTC123JS	1	2213640T	
PCB1	Q452 or	TR	KRC105M	(1)	2215830T	
PCB1	Q491	TR	RN1241-A(TPE4_F)	1	2213631T	
PCB1	Q491 or	TR	RN1241-B	(1)	2213632T	

PCB1	Q492	TR	RN1241-A(TPE4_F)	1	2213631T
PCB1	Q492 or	TR	RN1241-B	(1)	2213632T
PCB1	Q493	TR	KRA102M	1	2215770T
PCB1	Q493 or	TR	DTA114ES	(1)	2213510T
PCB1	Q495	TR	RN1241-A(TPE4_F)	1	2213631T
PCB1	Q495 or	TR	RN1241-B	(1)	2213632T
PCB1	Q496	TR	RN1241-A(TPE4_F)	1	2213631T
PCB1	Q496 or	TR	RN1241-B	(1)	2213632T
PCB1	Q501	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q502	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q503	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q504	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q505	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q505 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q506	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q506 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q507	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q507 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q508	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q508 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q509	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q509 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q510	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q510 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q513	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q513 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q514	TR	2SA949-Y(TPE6_F)	1	2211354T
PCB1	Q514 or	TR	2SA949-O(TPE6_F)	(1)	2211353T
PCB1	Q515	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q515 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q516	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q516 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q517	TR	2SC5171(ONK_Q)	1	2203010

PCB1	Q518	TR	2SC5171(ONK_Q)	1	2203010
PCB1	Q519	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q520	TR	2SA1930(ONK_Q)	1	2203000
PCB1	Q527	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q527 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q528	TR	2SC2229-Y(TPE6_F)	1	2211634T
PCB1	Q528 or	TR	2SC2229-O(TPE6_F)	(1)	2211633T
PCB1	Q529	TR	2SC2458-GR	1	2212115T
PCB1	Q529 or	TR	2SC2458-BL	(1)	2212116T
PCB1	Q529 or	TR	KTC3199-GR	(1)	2215864T
PCB1	Q530	TR	2SC2458-GR	1	2212115T
PCB1	Q530 or	TR	2SC2458-BL	(1)	2212116T
PCB1	Q530 or	TR	KTC3199-GR	(1)	2215864T
PCB1	Q531	TR	2SC1740S-S	1	2213285T
PCB1	Q532	TR	2SC1740S-S	1	2213285T
PCB1	Q533	TR	2SC1740S-S	1	2213285T
PCB1	Q534	TR	2SC1740S-S	1	2213285T
PCB1	Q581	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q581 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q582	TR	2SC2240-BL(TPE2_F)	1	2211406T
PCB1	Q582 or	TR	2SC2240-GR	(1)	2211405T
PCB1	Q583	TR	2SA970-GR	1	2211395T
PCB1	Q583 or	TR	2SA970-BL(TPE2_F)	(1)	2211396T
PCB1	Q583 or	TR	KTA1268-GR	(1)	2215885T
PCB1	Q583 or	TR	KTA1268-BL	(1)	2215886T
PCB1	Q591	TR	DTC123JS	1	2213640T
PCB1	Q591 or	TR	KRC105M	(1)	2215830T
PCB1	Q592	TR	DTC123JS	1	2213640T
PCB1	Q592 or	TR	KRC105M	(1)	2215830T
PCB1	Q921	IC	78M12HF(NJM78M12FA)	1	222780125JRC
PCB1	Q921 or	IC	MPC78M12AHF-AZ	(1)	222780125NEC
PCB1	Q921A	HEAT SINK	RAD-164	1	27160499
PCB1	Q921C	SCREW	3P+6FN(3BC)	1	82143006GR

PCB1	Q922	IC	79M12HF(NJM79M12FA)	1	222790125JRC	
PCB1	Q922 or	IC	79M12HF(MPC79M12HF)	(1)	222790125NEC	
PCB1	Q922C	SCREW	3P+6FN(3BC)	1	82143006GR	
PCB1	Q924	TR	2SA965-Y(TPE6_F)	1	2211644T	
PCB1	Q925	TR	DTC123JS	1	2213640T	<MDC>
PCB1	Q925 or	TR	KRC105M	(1)	2215830T	<MDC>
PCB1	D361	ZENER D	MTZJ7.5B	1	224470752T	
PCB1	D362	ZENER D	MTZJ7.5B	1	224470752T	
PCB1	D450	DIODE	1SS133	1	223163T	
PCB1	D491	DIODE	1SS133	1	223163T	
PCB1	D511	DIODE	1SS133	1	223163T	
PCB1	D512	DIODE	1SS133	1	223163T	
PCB1	D571	ZENER D	MTZJ5.1B	1	224470512T	
PCB1	D591	DIODE	1SS133	1	223163T	
PCB1	D592	DIODE	1SS133	1	223163T	
PCB1	D912	DIODE	D10XB60H	1	22380337F	<MDC>
PCB1	D920	DIODE	RL1N4003	1	22380260T	
PCB1	D921	DIODE	RL1N4003	1	22380260T	
PCB1	D922	ZENER D	MTZJ33B	1	224473302T	
PCB1	D924	DIODE	RL1N4003	1	22380260T	
PCB1	D931	DIODE	RL1N4003	1	22380260T	
PCB1	D932	DIODE	RL1N4003	1	22380260T	
PCB1	D933	DIODE	RL1N4003	1	22380260T	
PCB1	D934	DIODE	RL1N4003	1	22380260T	
PCB1	D951	DIODE	1SS133	1	223163T	<MDC>
PCB1	D952	DIODE	1SS133	1	223163T	
PCB1	D953	DIODE	1SS133	1	223163T	
PCB1	D954	ZENER D	MTZJ4.7B	1	224470472T	
PCB1	D961	DIODE	D3SBA20	1	22380271F	<MDC>
PCB1	D961 or	DIODE	RBV402	(1)	22380022F	<MDC>
PCB1	D983	DIODE	1SS133	1	223163T	
PCB1	D984	DIODE	1SS133	1	223163T	
PCB1	L501	S COIL	S-1.3C	1	231176S	

PCB1	L502	S COIL	S-1.3C	1	231176S	
PCB1	C301	TF C	ECQ-B50V-471J	1	374724714T	
PCB1	C302	TF C	ECQ-B50V-471J	1	374724714T	
PCB1	C303	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C304	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C305	TF C	ECQ-B50V-152J	1	374721524T	
PCB1	C306	TF C	ECQ-B50V-152J	1	374721524T	
PCB1	C307	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB1	C308	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	
PCB1	C309	TF C	ECQ-B50V-682J	1	374726824T	
PCB1	C310	TF C	ECQ-B50V-682J	1	374726824T	
PCB1	C311	TF C	ECQ-B50V-182J	1	374721824T	
PCB1	C312	TF C	ECQ-B50V-182J	1	374721824T	
PCB1	C313	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C314	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C315	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C316	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C317	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C317	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C318	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C318	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C321	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C321	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C322	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C322	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C323	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C323	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C324	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C324	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C325	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C325	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C326	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C326	TF C	ECQ-B50V-331K	1	374723315T	<MPA>

PCB1	C327	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C327	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C328	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C328	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C331	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C331	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C332	TF C	ECQ-B50V-331K	1	374723315T	<MPP>
PCB1	C332	TF C	ECQ-B50V-331K	1	374723315T	<MPA>
PCB1	C341	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C342	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C343	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C345	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C361	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C362	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C363	VR C	CE04W10V-470M(VR)	1	394634717T	
PCB1	C364	VR C	CE04W10V-470M(VR)	1	394634717T	
PCB1	C365	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C366	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C371	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C372	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C373	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C374	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C375	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C376	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C377	TF C	ECQ-B50V-223J	1	374722234T	
PCB1	C378	TF C	ECQ-B50V-223J	1	374722234T	
PCB1	C379	TF C	ECQ-V50V-474J	1	374724744T	
PCB1	C380	TF C	ECQ-V50V-474J	1	374724744T	
PCB1	C381	TF C	ECQ-V50V-823J	1	374728234T	
PCB1	C382	TF C	ECQ-V50V-823J	1	374728234T	
PCB1	C383	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C384	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C385	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	

PCB1	C386	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C388	TF C	ECQ-V50V-474J	1	374724744T	
PCB1	C391	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C392	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C401	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C402	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C403	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C404	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C405A	TF C	ECQ-V50V-473J	1	374724734T	<MDC>
PCB1	C405A	TF C	ECQ-V50V-473J	1	374724734T	<MPP>
PCB1	C405A	TF C	ECQ-V50V-473J	1	374724734T	<MPA>
PCB1	C406A	TF C	ECQ-V50V-473J	1	374724734T	<MDC>
PCB1	C406A	TF C	ECQ-V50V-473J	1	374724734T	<MPP>
PCB1	C406A	TF C	ECQ-V50V-473J	1	374724734T	<MPA>
PCB1	C407	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C408	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C409A	TF C	ECQ-V50V-224J	1	374722244T	<MDC>
PCB1	C409A	TF C	ECQ-V50V-224J	1	374722244T	<MPP>
PCB1	C409A	TF C	ECQ-V50V-224J	1	374722244T	<MPA>
PCB1	C410A	TF C	ECQ-V50V-224J	1	374722244T	<MDC>
PCB1	C410A	TF C	ECQ-V50V-224J	1	374722244T	<MPP>
PCB1	C410A	TF C	ECQ-V50V-224J	1	374722244T	<MPA>
PCB1	C411A	TF C	ECQ-B50V-153J	1	374721534T	<MDC>
PCB1	C411A	TF C	ECQ-B50V-153J	1	374721534T	<MPP>
PCB1	C411A	TF C	ECQ-B50V-153J	1	374721534T	<MPA>
PCB1	C412A	TF C	ECQ-B50V-153J	1	374721534T	<MDC>
PCB1	C412A	TF C	ECQ-B50V-153J	1	374721534T	<MPP>
PCB1	C412A	TF C	ECQ-B50V-153J	1	374721534T	<MPA>
PCB1	C413A	TF C	ECQ-V50V-823J	1	374728234T	<MDC>
PCB1	C413A	TF C	ECQ-V50V-823J	1	374728234T	<MPP>
PCB1	C413A	TF C	ECQ-V50V-823J	1	374728234T	<MPA>
PCB1	C414A	TF C	ECQ-V50V-823J	1	374728234T	<MDC>
PCB1	C414A	TF C	ECQ-V50V-823J	1	374728234T	<MPP>

PCB1	C414A	TF C	ECQ-V50V-823J	1	374728234T	<MPA>
PCB1	C415	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C416	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB1	C423	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C424	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C425	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C426	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C428	TF C	ECQ-V50V-334J	1	374723344T	
PCB1	C429	TF C	ECQ-V50V-334J	1	374723344T	
PCB1	C442	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB1	C451	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C452	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C453	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C454	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C455	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C456	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C459	TF C	ECQ-B50V-103J	1	374721034T	
PCB1	C461	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C462	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C501	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C502	UTSP C	CE04W50V 47M(UTSP)	1	397584707T	
PCB1	C503	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C504	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C505	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C506	UTSP C	CE04W25V-220M(UTSP)	1	397552217T	
PCB1	C509	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C510	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C513	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C514	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB1	C515	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C516	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C517	TF C	ECQ-V50V-473J	1	374724734T	
PCB1	C518	TF C	ECQ-V50V-473J	1	374724734T	

PCB1	C519	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C520	TF C	ECQ-V50V-104J	1	374721044T	
PCB1	C521	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C522	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C523	CERA C	CC45SL50V-020C	1	345020201T	
PCB1	C524	CERA C	CC45SL50V-020C	1	345020201T	
PCB1	C527	VR C	CE04W100V-47M(VR)	1	394694707T	<MDC>
PCB1	C527	VR C	CE04W63V-47M(VR)	1	394674707T	<MPP>
PCB1	C527	VR C	CE04W63V-47M(VR)	1	394674707T	<MPA>
PCB1	C528	VR C	CE04W100V-47M(VR)	1	394694707T	<MDC>
PCB1	C528	VR C	CE04W63V-47M(VR)	1	394674707T	<MPP>
PCB1	C528	VR C	CE04W63V-47M(VR)	1	394674707T	<MPA>
PCB1	C529	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C530	TF C	ECQ-B50V-101K	1	374721015T	
PCB1	C531	TF C	ECQ-B50V-102J	1	374721024T	
PCB1	C532	TF C	ECQ-B50V-102J	1	374721024T	
PCB1	C533	TF C	ECQ-B50V-102J	1	374721024T	
PCB1	C534	TF C	ECQ-B50V-102J	1	374721024T	
PCB1	C535	TF C	ECQ-B50V-102J	1	374721024T	
PCB1	C536	TF C	ECQ-B50V-102J	1	374721024T	
PCB1	C581	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB1	C582	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C583	UTSP C	CE04W50V-1M(UTSP)	1	397580107T	
PCB1	C591	TF C	ECQ-B50V-103J	1	374721034T	
PCB1	C592	TF C	ECQ-B50V-103J	1	374721034T	
PCB1	C911	TF C	ECQ-V100-334J	1	374733344T	<MDC>
PCB1	C911	TF C	ECQ-V50V-334J	1	374723344T	<MPP>
PCB1	C911	TF C	ECQ-V50V-334J	1	374723344T	<MPA>
PCB1	C912	TF C	ECQ-V100-334J	1	374733344T	<MDC>
PCB1	C912	TF C	ECQ-V50V-334J	1	374723344T	<MPP>
PCB1	C912	TF C	ECQ-V50V-334J	1	374723344T	<MPA>
PCB1	C915	ELECT C	CE69W69V-10000MA	1	3504425	<MDC>
PCB1	C915	ELECT C	CE69W56V-8200MB	1	3504416	<MPP>

PCB1	C915	ELECT C	CE69W56V-8200MB	1	3504416	<MPA>
PCB1	C916	ELECT C	CE69W69V-10000MA	1	3504425	<MDC>
PCB1	C916	ELECT C	CE69W56V-8200MB	1	3504416	<MPP>
PCB1	C916	ELECT C	CE69W56V-8200MB	1	3504416	<MPA>
PCB1	C918	VR C	CE04W35V-1000M(VR)	1	394661027S	
PCB1	C919	UTSP C	CE04W35V-330M(UTSP)	1	397563317T	
PCB1	C920	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C921	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C922	VR C	CE04W35V-47M(VR)	1	394664707T	
PCB1	C923	VR C	CE04W35V-47M(VR)	1	394664707T	
PCB1	C924	TF C	ECQ-V50V-334J	1	374723344T	
PCB1	C925	TF C	ECQ-V50V-334J	1	374723344T	
PCB1	C926	UTSP C	CE04W50V-100M(UTSP)	1	397581017T	
PCB1	C928	UTSP C	CE04W50V-100M(UTSP)	1	397581017T	
PCB1	C930	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C931	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C941	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	
PCB1	C953	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T	
PCB1	C961	TF C	ECQ-V50V-334J	1	374723344T	<MDC>
PCB1	C962	VR C	CE04W25V-4700M(VR)	1	394654727S	<MDC>
PCB1	C971	CERA C	CK45F50V-223Z	1	335622230T	
PCB1	C982	TF C	ECQ-B50V-222J	1	374722224T	
PCB1	C991	TF C	ECQ-V50V-104J	1	374721044T	<MDC>
PCB1	C992	TF C	ECQ-V50V-104J	1	374721044T	<MDC>
PCB1	C992	TF C	ECQ-V50V-104J	1	374721044T	<MPP>
PCB1	C992	TF C	ECQ-V50V-104J	1	374721044T	<MPA>
PCB1	C993	TF C	ECQ-V50V-104J	1	374721044T	<MPP>
PCB1	C993	TF C	ECQ-V50V-104J	1	374721044T	<MPA>
PCB1	R301	CARBON R	R16J-1K	1	417341024T	
PCB1	R302	CARBON R	R16J-1K	1	417341024T	
PCB1	R303	CARBON R	R16J-56K	1	417345634T	
PCB1	R304	CARBON R	R16J-56K	1	417345634T	
PCB1	R305	CARBON R	R16J-220K	1	417342244T	

PCB1	R306	CARBON R	R16J-220K	1	417342244T	
PCB1	R307	CARBON R	R16J-820	1	417348214T	
PCB1	R308	CARBON R	R16J-820	1	417348214T	
PCB1	R309	CARBON R	R16J-470K	1	417344744T	
PCB1	R310	CARBON R	R16J-470K	1	417344744T	
PCB1	R311	CARBON R	R16J-39K	1	417343934T	
PCB1	R312	CARBON R	R16J-39K	1	417343934T	
PCB1	R313	CARBON R	R16J-100K	1	417341044T	
PCB1	R314	CARBON R	R16J-100K	1	417341044T	
PCB1	R315	CARBON R	R16J-330	1	417343314T	
PCB1	R316	CARBON R	R16J-330	1	417343314T	
PCB1	R317	CARBON R	R16J-1M	1	417341054T	
PCB1	R318	CARBON R	R16J-1M	1	417341054T	
PCB1	R319	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R320	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R321	CARBON R	R16J-1M	1	417341054T	
PCB1	R322	CARBON R	R16J-1M	1	417341054T	
PCB1	R323	CARBON R	R16J-330	1	417343314T	
PCB1	R324	CARBON R	R16J-330	1	417343314T	
PCB1	R325	CARBON R	R16J-1M	1	417341054T	
PCB1	R326	CARBON R	R16J-1M	1	417341054T	
PCB1	R327	CARBON R	R16J-330	1	417343314T	
PCB1	R328	CARBON R	R16J-330	1	417343314T	
PCB1	R329	CARBON R	R16J-1M	1	417341054T	
PCB1	R330	CARBON R	R16J-1M	1	417341054T	
PCB1	R331	CARBON R	R16J-330	1	417343314T	
PCB1	R332	CARBON R	R16J-330	1	417343314T	
PCB1	R333	CARBON R	R16J-1M	1	417341054T	
PCB1	R334	CARBON R	R16J-1M	1	417341054T	
PCB1	R335	CARBON R	R16J-330	1	417343314T	
PCB1	R336	CARBON R	R16J-330	1	417343314T	
PCB1	R337	CARBON R	R16J-1M	1	417341054T	
PCB1	R338	CARBON R	R16J-1M	1	417341054T	

PCB1	R339	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R340	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R341	CARBON R	R16J-1M	1	417341054T	
PCB1	R342	CARBON R	R16J-1M	1	417341054T	
PCB1	R343	CARBON R	R16J-330	1	417343314T	
PCB1	R344	CARBON R	R16J-330	1	417343314T	
PCB1	R345	CARBON R	R16J-1M	1	417341054T	
PCB1	R346	CARBON R	R16J-1M	1	417341054T	
PCB1	R349	CARBON R	R16J-22K	1	417342234T	
PCB1	R350	CARBON R	R16J-22K	1	417342234T	
PCB1	R353	NF CARBON R	R25J-10	1	415471004T	
PCB1	R354	NF CARBON R	R25J-10	1	415471004T	
PCB1	R361	METAL O R	RS1/2WBJ-68	1	443526804T	
PCB1	R362	METAL O R	RS1/2WBJ-68	1	443526804T	
PCB1	R363	NF CARBON R	R25J-470	1	415474714T	
PCB1	R364	NF CARBON R	R25J-470	1	415474714T	
PCB1	R371	CARBON R	R16J-1K	1	417341024T	
PCB1	R372	CARBON R	R16J-1K	1	417341024T	
PCB1	R373	CARBON R	R16J-1K	1	417341024T	
PCB1	R375	CARBON R	R16J-1.8K	1	417341824T	
PCB1	R376	CARBON R	R16J-1.8K	1	417341824T	
PCB1	R377	CARBON R	R16J-10K	1	417341034T	
PCB1	R378	CARBON R	R16J-10K	1	417341034T	
PCB1	R393A	VARI R	N11RLC250KWT30Z	1	5132551	<MDC>
PCB1	R393A	VARI R	N11RLC250KWT30Z	1	5132551	<MPP>
PCB1	R393A	VARI R	N11RLC250KWT30Z	1	5132551	<MPA>
PCB1	R401	CARBON R	R16J-1K	1	417341024T	
PCB1	R402	CARBON R	R16J-1K	1	417341024T	
PCB1	R403	CARBON R	R16J-220K	1	417342244T	
PCB1	R404	CARBON R	R16J-220K	1	417342244T	
PCB1	R405	CARBON R	R16J-22K	1	417342234T	
PCB1	R406	CARBON R	R16J-22K	1	417342234T	
PCB1	R407	CARBON R	R16J-3.3K	1	417343324T	

PCB1	R408	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R409A	VARI R	N14RGLC100KC30Z	1	5132549	<MDC>
PCB1	R409A	VARI R	N14RGLC100KC30Z	1	5132549	<MPP>
PCB1	R409A	VARI R	N14RGLC100KC30Z	1	5132549	<MPA>
PCB1	R411A	CARBON R	R16J-220	1	417342214T	<MDC>
PCB1	R411A	CARBON R	R16J-220	1	417342214T	<MPP>
PCB1	R411A	CARBON R	R16J-220	1	417342214T	<MPA>
PCB1	R412A	CARBON R	R16J-220	1	417342214T	<MDC>
PCB1	R412A	CARBON R	R16J-220	1	417342214T	<MPP>
PCB1	R412A	CARBON R	R16J-220	1	417342214T	<MPA>
PCB1	R413A	CARBON R	R16J-1K	1	417341024T	<MDC>
PCB1	R413A	CARBON R	R16J-1K	1	417341024T	<MPP>
PCB1	R413A	CARBON R	R16J-1K	1	417341024T	<MPA>
PCB1	R414A	CARBON R	R16J-1K	1	417341024T	<MDC>
PCB1	R414A	CARBON R	R16J-1K	1	417341024T	<MPP>
PCB1	R414A	CARBON R	R16J-1K	1	417341024T	<MPA>
PCB1	R415A	VARI R	N14RGLC50KC30Z	1	5132550	<MDC>
PCB1	R415A	VARI R	N14RGLC50KC30Z	1	5132550	<MPP>
PCB1	R415A	VARI R	N14RGLC50KC30Z	1	5132550	<MPA>
PCB1	R417A	CARBON R	R16J-4.7K	1	417344724T	<MDC>
PCB1	R417A	CARBON R	R16J-4.7K	1	417344724T	<MPP>
PCB1	R417A	CARBON R	R16J-4.7K	1	417344724T	<MPA>
PCB1	R418A	CARBON R	R16J-4.7K	1	417344724T	<MDC>
PCB1	R418A	CARBON R	R16J-4.7K	1	417344724T	<MPP>
PCB1	R418A	CARBON R	R16J-4.7K	1	417344724T	<MPA>
PCB1	R419	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R420	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R435	CARBON R	R16J-220K	1	417342244T	
PCB1	R436	CARBON R	R16J-2.2K	1	417342224T	
PCB1	R441	NF CARBON R	R25J-10	1	415471004T	
PCB1	R442	NF CARBON R	R25J-10	1	415471004T	
PCB1	R451	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R452	CARBON R	R16J-3.3K	1	417343324T	

PCB1	R453	CARBON R	R16J-220K	1	417342244T	
PCB1	R454	CARBON R	R16J-220K	1	417342244T	
PCB1	R455	CARBON R	R16J-22K	1	417342234T	
PCB1	R456	CARBON R	R16J-22K	1	417342234T	
PCB1	R457	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R458	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R459	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R460	CARBON R	R16J-4.7K	1	417344724T	
PCB1	R461	CARBON R	R16J-100K	1	417341044T	
PCB1	R462	CARBON R	R16J-100K	1	417341044T	
PCB1	R463	CARBON R	R16J-220K	1	417342244T	
PCB1	R464	CARBON R	R16J-220K	1	417342244T	
PCB1	R491	CARBON R	R16J-47K	1	417344734T	
PCB1	R492	CARBON R	R16J-47K	1	417344734T	
PCB1	R493	CARBON R	R16J-270	1	417342714T	
PCB1	R494	CARBON R	R16J-270	1	417342714T	
PCB1	R495	CARBON R	R16J-100	1	417341014T	
PCB1	R496	CARBON R	R16J-100	1	417341014T	
PCB1	R501	CARBON R	R16J-470	1	417344714T	
PCB1	R502	CARBON R	R16J-470	1	417344714T	
PCB1	R503	CARBON R	R16J-27K	1	417342734T	
PCB1	R504	CARBON R	R16J-27K	1	417342734T	
PCB1	R505	CARBON R	R16J-10	1	417341004T	
PCB1	R506	CARBON R	R16J-10	1	417341004T	
PCB1	R507	CARBON R	R16J-47	1	417344704T	
PCB1	R508	CARBON R	R16J-47	1	417344704T	
PCB1	R509	CARBON R	R16J-47	1	417344704T	
PCB1	R510	CARBON R	R16J-47	1	417344704T	
PCB1	R511	CARBON R	R16J-5.6K	1	417345624T	
PCB1	R512	CARBON R	R16J-5.6K	1	417345624T	
PCB1	R513	CARBON R	R16J-56K	1	417345634T	
PCB1	R514	CARBON R	R16J-56K	1	417345634T	
PCB1	R515	CARBON R	R16J-1K	1	417341024T	<MDC>

PCB1	R515	CARBON R	R16J-1.5K	1	417341524T	<MPP>
PCB1	R515	CARBON R	R16J-1.5K	1	417341524T	<MPA>
PCB1	R516	CARBON R	R16J-1K	1	417341024T	<MDC>
PCB1	R516	CARBON R	R16J-1.5K	1	417341524T	<MPP>
PCB1	R516	CARBON R	R16J-1.5K	1	417341524T	<MPA>
PCB1	R517	CARBON R	R16J-1K	1	417341024T	
PCB1	R518	CARBON R	R16J-1K	1	417341024T	
PCB1	R519	CARBON R	R16J-1K	1	417341024T	
PCB1	R520	CARBON R	R16J-1K	1	417341024T	
PCB1	R521	METAL O R	RS1/2WBJ-82	1	443528204T	
PCB1	R522	METAL O R	RS1/2WBJ-82	1	443528204T	
PCB1	R523	METAL O R	RS1/2WBJ-82	1	443528204T	
PCB1	R524	METAL O R	RS1/2WBJ-82	1	443528204T	
PCB1	R525	METAL O R	RS1/2WBJ-68	1	443526804T	
PCB1	R526	METAL O R	RS1/2WBJ-68	1	443526804T	
PCB1	R527	METAL O R	RS1/2WBJ-82	1	443528204T	
PCB1	R528	METAL O R	RS1/2WBJ-82	1	443528204T	
PCB1	R529	METAL O R	RS1/2WBJ-47	1	443524704T	
PCB1	R530	METAL O R	RS1/2WBJ-47	1	443524704T	
PCB1	R531	CARBON R	R16J-18K	1	417341834T	
PCB1	R532	CARBON R	R16J-18K	1	417341834T	
PCB1	R533	CARBON R	R16J-56K	1	417345634T	
PCB1	R534	CARBON R	R16J-56K	1	417345634T	
PCB1	R535	CARBON R	R16J-18K	1	417341834T	
PCB1	R536	CARBON R	R16J-18K	1	417341834T	
PCB1	R539	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R540	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R541	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R542	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R543	METAL O R	RS1/2WBJ-220	1	443522214T	
PCB1	R544	METAL O R	RS1/2WBJ-220	1	443522214T	
PCB1	R545	CARBON R	R16J-22K	1	417342234T	
PCB1	R546	CARBON R	R16J-22K	1	417342234T	

PCB1	R547	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R548	METAL PR	MPR5W+5W 0R22	1	4000233	
PCB1	R549	CARBON R	R16J-2.7K	1	417342724T	<MDC>
PCB1	R549	CARBON R	R16J-3.3K	1	417343324T	<MPP>
PCB1	R549	CARBON R	R16J-3.3K	1	417343324T	<MPA>
PCB1	R550	CARBON R	R16J-2.7K	1	417342724T	<MDC>
PCB1	R550	CARBON R	R16J-3.3K	1	417343324T	<MPP>
PCB1	R550	CARBON R	R16J-3.3K	1	417343324T	<MPA>
PCB1	R551	CARBON R	R16J-33K	1	417343334T	
PCB1	R552	CARBON R	R16J-33K	1	417343334T	
PCB1	R553	CARBON R	R16J-47K	1	417344734T	
PCB1	R554	CARBON R	R16J-47K	1	417344734T	
PCB1	R555	METAL R	RNU1/2WCJ-8.2	1	453530824T	
PCB1	R556	METAL R	RNU1/2WCJ-8.2	1	453530824T	
PCB1	R557	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R558	NF CARBON R	R25J-2.2	1	415470224T	
PCB1	R561	CARBON R	R16J-270	1	417342714T	
PCB1	R562	CARBON R	R16J-270	1	417342714T	
PCB1	R563	CARBON R	R16J-100K	1	417341044T	
PCB1	R564	CARBON R	R16J-100K	1	417341044T	
PCB1	R565	CARBON R	R16J-120K	1	417341244T	
PCB1	R566	CARBON R	R16J-120K	1	417341244T	
PCB1	R567	CARBON R	R16J-22	1	417342204T	
PCB1	R568	CARBON R	R16J-22	1	417342204T	
PCB1	R569	CARBON R	R16J-22	1	417342204T	
PCB1	R570	CARBON R	R16J-22	1	417342204T	
PCB1	R571	CARBON R	R16J-33K	1	417343334T	
PCB1	R572	CARBON R	R16J-22K	1	417342234T	
PCB1	R573	CARBON R	R16J-10K	1	417341034T	
PCB1	R574	CARBON R	R16J-47K	1	417344734T	
PCB1	R575	CARBON R	R16J-220K	1	417342244T	
PCB1	R577	CARBON R	R16J-120K	1	417341244T	
PCB1	R578	CARBON R	R16J-120K	1	417341244T	

PCB1	R579	CARBON R	R16J-330	1	417343314T	
PCB1	R580	CARBON R	R16J-330	1	417343314T	
PCB1	R581	CARBON R	R16J-5.6K	1	417345624T	
PCB1	R582	CARBON R	R16J-5.6K	1	417345624T	
PCB1	R583	CARBON R	R16J-3.9K	1	417343924T	
PCB1	R584	CARBON R	R16J-3.9K	1	417343924T	
PCB1	R585	CARBON R	R16J-470	1	417344714T	<MDC>
PCB1	R585	CARBON R	R16J-820	1	417348214T	<MPP>
PCB1	R585	CARBON R	R16J-820	1	417348214T	<MPA>
PCB1	R586	CARBON R	R16J-470	1	417344714T	<MDC>
PCB1	R586	CARBON R	R16J-820	1	417348214T	<MPP>
PCB1	R586	CARBON R	R16J-820	1	417348214T	<MPA>
PCB1	R587	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R588	TRIM R	N06HR2KBC	1	5210390T	
PCB1	R589	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R590	CARBON R	R16J-3.3K	1	417343324T	
PCB1	R593	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R594	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R595	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB1	R598	METAL O R	RS1WBJ-390	1	443623914T	
PCB1	R599	METAL O R	RS1WBJ-390	1	443623914T	
PCB1	R919	METAL R	RNU1/2WCJ-1	1	453530104T	
PCB1	R921	METAL R	RNU1/2WCJ-0.47	1	453534794T	
PCB1	R922	METAL R	RNU1/2WCJ-0.47	1	453534794T	
PCB1	R923	METAL R	RNU1/2WCJ-4.7	1	453530474T	
PCB1	R924	METAL O R	RS1/2WBJ-470	1	443524714T	
PCB1	R925	METAL O R	RS1/2WBJ-10	1	443521004T	<MDC>
PCB1	R931	NF CARBON R	R25J-2.2K	1	415472224T	
PCB1	R932	CARBON R	R16J-330K	1	417343344T	
PCB1	R933	METAL O R	RS1/2WBJ-22	1	443522204T	
PCB1	R934	METAL O R	RS1/2WBJ-100	1	443521014T	
PCB1	R935	METAL O R	RS1/2WBJ-39	1	443523904T	
PCB1	R951	METAL R	RNU1/2WCJ-2.2	1	453530224T	

PCB1	R952	METAL R	RNU1/2WCJ-2.2	1	453530224T	
PCB1	R953	CARBON R	R16J-100K	1	417341044T	
PCB1	RL450	RELAY	NRL-2P2A-DC12-178	1	25065664	
PCB1	RL591	RELAY	NRL-2P5A-DC24-158	1	25065618	!
PCB1	RL591 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563A	!
PCB1	RL592	RELAY	NRL-2P5A-DC24-158	1	25065618	!
PCB1	RL592 or	RELAY	NRL-2P5A-DC24-129	(1)	25065563A	!
PCB1	RL921	RELAY	NRL-1P10A-DC12-140	1	25065584	!, <MDC>
PCB1	RL922	RELAY	NRL-1P10A-DC12-140	1	25065584	!, <MDC>
PCB1	P301	PIN JACK	NPJ-6PDRW665	1	25045894	
PCB1	P301 or	PIN JACK	NPJ-6PDBL380	(1)	25045565	
PCB1	P302	PIN JACK	NPJ-6PDRW665	1	25045894	
PCB1	P302 or	PIN JACK	NPJ-6PDBL380	(1)	25045565	
PCB1	P303	PIN JACK	NPJ-6PDRW665	1	25045894	
PCB1	P303 or	PIN JACK	NPJ-6PDBL380	(1)	25045565	
PCB1	P371	JUMPER LEAD	JL11 200 B	1	---	NSP
PCB1	P371A	WIRE HOL	NSCT-11P882	1	25051095	
PCB1	P501	TRM	NTM-4PDMNRR420	1	25060492	
PCB1	P502	TRM	NTM-4PDMNRR420	1	25060492	
PCB1	P511	PLUG	NPLG-2P130	1	25055146	
PCB1	P512	PLUG	NPLG-2P130	1	25055146	
PCB1	P701B	PLUG	NPLG-7P0962	1	25056012	
PCB1	P702B	PLUG	NPLG-19P0974	1	25056024	
PCB1	P704B	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB1	P705B	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB1	P706	RETAINER	(JOINT)	1	27142069	
PCB1	P914A	CRIMP AS	CRIMP AS	1	2069925402UL	<MDC>
PCB1	P914C	CRIMP AS	CRIMP AS	1	2069925402UL	<MPP>
PCB1	P914C	CRIMP AS	CRIMP AS	1	2069925402UL	<MPA>
PCB1	P915A	CRIMP AS	CRIMP AS	1	2069925450UL	<MDC>
PCB1	P915C	CRIMP AS	CRIMP AS	1	2069925450UL	<MPP>
PCB1	P915C	CRIMP AS	CRIMP AS	1	2069925450UL	<MPA>
PCB1	P916A	CRIMP AS	CRIMP AS	1	2069925459UL	<MDC>

PCB1	P916C	CRIMP AS	CRIMP AS	1	2069925459UL	<MPP>
PCB1	P916C	CRIMP AS	CRIMP AS	1	2069925459UL	<MPA>
PCB1	P919	TRM	NTM-1P233(M1969)	1	25060302	<MDC>
PCB1	E591	RETAINER	MET37-0002	1	27142009T	
PCB1	E592	RETAINER	MET37-0002	1	27142009T	
PCB1	F911A	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB1	F911B	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB1	F912A	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB1	F912B	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB1	F913A	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB1	F913B	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB1	JL401	JUMPER LEAD	JL9 100 B	1	---	NSP
PCB1	JL401A	WIRE TRAP	NPLG-9P592	1	25055630	
PCB1	JL401C	WIRE HOL	NSCT-9P880	1	25051093	<MDC>
PCB1	JL401C	WIRE HOL	NSCT-9P880	1	25051093	<MPP>
PCB1	JL401C	WIRE HOL	NSCT-9P880	1	25051093	<MPA>
PCB1	JL711B	SOCKET	NSCT-3P95	1	25050267	
PCB1	JL716B	SOCKET	NSCT-3P95	1	25050267	
PCB1	JL913	JUMPER LEAD	JL5 600H	1	---	NSP
PCB1	JL913A	WIRE HOL	NSCT-5P896	1	25051109	
PCB1	JL913B	WIRE HOL	NSCT-5P896	1	25051109	
PCB1	JL915	JUMPER LEAD	JL3 450 H	1	---	NSP, <MDC>
PCB1	JL915A	WIRE HOL	NSCT-3P894	1	25051107	<MDC>
PCB1	JL915B	WIRE HOL	NSCT-3P894	1	25051107	<MDC>
PCB1	JL917	JUMPER LEAD	JL5 400 H	1	---	NSP, <MDC>
PCB1	JL917A	WIRE HOL	NSCT-5P896	1	25051109	<MDC>
PCB1	JL917B	WIRE HOL	NSCT-5P896	1	25051109	<MDC>
PCB1	JL918	JUMPER LEAD	JL5 100 H	1	---	NSP, <MDC>
PCB1	JL918A	SOCKET	NSCT-5P97	1	25050269	<MDC>
PCB1	JL918B	WIRE HOL	NSCT-5P896	1	25051109	<MDC>

PCB2 **U06** ZONE 2/ XM PC BOARD (NAAR-9631-1C/ 1E/ 1D)

PCB2

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB2	Q201	IC	BU9450KV-E2	1	22242505R2	<MDC>
PCB2	Q202	IC	AK4388ET-E2	1	22242519R2	<MDC>
PCB2	Q203	IC	NJM4580M-D	1	22241448R2	<MDC>
PCB2	Q204	IC	TA48033AF(TE16L_NQ)	1	22278033DR2TO	<MDC>
PCB2	Q204 or	IC	BA33BC0FP	(1)	22278033DR2RH	<MDC>
PCB2	Q204 or	IC	NJM2391DL1-33	(1)	22278033DR2JR	<MDC>
PCB2	Q204 or	IC	TA48033BF(TE16L_NQ)	(1)	22278033DBR2TO	<MDC>
PCB2	Q205	IC	78L05(NJM78L05UA)	1	222780053R2JR	<MDC>
PCB2	Q206	IC	TC74HCT7007AF(EL_F)	1	222740077R2TO	<MDC>
PCB2	Q207	IC	TC74VHC541FT(EKJ)	1	22274541E1R2TO	<MDC>
PCB2	Q207 or	IC	SN74AHC541PWR	(1)	22274541IR2TI	<MDC>
PCB2	Q208	TR	2SA1930(ONK_Q)	1	2203000	<MDC>
PCB2	Q208A	HEAT SINK	RAD-083	1	27160271	<MDC>
PCB2	Q208B	SCREW	3P+10FN(3BC)	1	82143010GR	<MDC>
PCB2	Q209	IC	S-812C53AUA-C3HT2G	1	22242270R2	<MDC>
PCB2	Q831	TR	RN1441	1	2215410R2	
PCB2	Q832	TR	RN1441	1	2215410R2	
PCB2	Q833	TR	RN1441	1	2215410R2	
PCB2	Q834	TR	RN1441	1	2215410R2	
PCB2	Q835	IC	NJM4580M-D	1	22241448R2	
PCB2	Q836	TR	RN1441	1	2215410R2	
PCB2	Q837	TR	RN1441	1	2215410R2	
PCB2	D201	DIODE	RL1N4003	1	22380260T	<MDC>
PCB2	D202	DIODE	RL1N4003	1	22380260T	<MDC>
PCB2	X201	CRYSTAL	DSX530GA 45.1584MHz	1	3010418R2	<MDC>
PCB2	L201	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	<MDC>
PCB2	L202	EMIFIL	BK1608LM182-T	1	230958R1	<MDC>
PCB2	L203	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	<MDC>
PCB2	L204	CHOKE COIL	BLM21PG221SN1	1	230949R2	<MDC>
PCB2	L205	CHOKE COIL	BLM21PG221SN1	1	230949R2	<MDC>
PCB2	L206	CHOKE COIL	BLM21PG221SN1	1	230949R2	<MDC>
PCB2	C201	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>

PCB2	C202	C-CERA C	CK725B1H-102K1	1	332101025R1	<MDC>
PCB2	C203	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C204	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C205	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C206	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C207	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	<MDC>
PCB2	C208	C-CERA C	CC725CH1H-040C1	1	342100401R1	<MDC>
PCB2	C209	C-CERA C	CC725CH1H-080D1	1	342100802R1	<MDC>
PCB2	C210	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C211	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C212	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C213	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C214	C-CERA C	CK725B1H-102K1	1	332101025R1	<MDC>
PCB2	C215	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C216	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC>
PCB2	C217	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C218	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	<MDC>
PCB2	C219	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C221	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC>
PCB2	C222	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC>
PCB2	C223	C-CERA C	CC725CH1H-471J1	1	342104714R1	<MDC>
PCB2	C224	C-CERA C	CC725CH1H-471J1	1	342104714R1	<MDC>
PCB2	C225	C-CERA C	CC725CH1H-471J1	1	342104714R1	<MDC>
PCB2	C226	C-CERA C	CC725CH1H-471J1	1	342104714R1	<MDC>
PCB2	C227	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC>
PCB2	C228	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC>
PCB2	C229	VR C	CE04W16V-220M(VR)	1	394642217T	<MDC>
PCB2	C230	VR C	CE04W16V-220M(VR)	1	394642217T	<MDC>
PCB2	C231	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C232	UTSP C	CE04W10V-470M(UTSP)	1	397534717T	<MDC>
PCB2	C233	C-CERA C	CK725B1H-102K1	1	332101025R1	<MDC>
PCB2	C234	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	<MDC>
PCB2	C235	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>

PCB2	C237	C-CERA C	CK725B1H-102K1	1	332101025R1	<MDC>
PCB2	C238	C-CERA C	CK725B1H-102K1	1	332101025R1	<MDC>
PCB2	C239	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C240	C-CERA C	CK725F1E-104Z1	1	332161040R1	<MDC>
PCB2	C241	UTSP C	CE04W50V-10M(UTSP)	1	397581007T	<MDC>
PCB2	C242	UTSP C	CE04W10V-100M(UTSP)	1	397531017T	<MDC>
PCB2	C831	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB2	C832	UTSP C	CE04W25V-47M(UTSP)	1	397554707T	
PCB2	C833	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C834	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C837	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C838	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C839	TF C	ECQ-B50V-471J	1	374724714T	
PCB2	C840	TF C	ECQ-B50V-471J	1	374724714T	
PCB2	C841	UTSP C	CE04W50V-4.7M(UTSP)	1	397580477T	
PCB2	C842	TF C	ECQ-B50V-102J	1	374721024T	
PCB2	C843	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB2	C844	VR C	CE04W16V-220M(VR)	1	394642217T	
PCB2	R201	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB2	R202	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB2	R203	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R204	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R205	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R206	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB2	R207	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R208	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB2	R209	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R210	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R211	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB2	R212	C-CARBON R	RN72K1J-102JE	1	435031024R1	<MDC>
PCB2	R213	C-CARBON R	RN72K1J-102JE	1	435031024R1	<MDC>
PCB2	R214	C-CARBON R	RN72K1J-101JE	1	435031014R1	<MDC>
PCB2	R215	C-CARBON R	RN72K1J-101JE	1	435031014R1	<MDC>

PCB2	R216	C-CARBON R	RN72K1J-681JE	1	435036814R1	<MDC>
PCB2	R217	C-CARBON R	RN72K1J-105JE	1	435031054R1	<MDC>
PCB2	R218	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC>
PCB2	R220	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R221	C-CARBON R	RN72K1J-101JE	1	435031014R1	<MDC>
PCB2	R222	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R223	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R224	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R225	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R227	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R228	C-CARBON R	RN72K1J-104JE	1	435031044R1	<MDC>
PCB2	R229	C-CARBON R	RN72K1J-332JE	1	435033324R1	<MDC>
PCB2	R230	C-CARBON R	RN72K1J-332JE	1	435033324R1	<MDC>
PCB2	R231	C-CARBON R	RN72K1J-332JE	1	435033324R1	<MDC>
PCB2	R232	C-CARBON R	RN72K1J-332JE	1	435033324R1	<MDC>
PCB2	R233	C-CARBON R	RN72K1J-332JE	1	435033324R1	<MDC>
PCB2	R234	C-CARBON R	RN72K1J-332JE	1	435033324R1	<MDC>
PCB2	R235	C-CARBON R	RN72K1J-392JE	1	435033924R1	<MDC>
PCB2	R236	C-CARBON R	RN72K1J-392JE	1	435033924R1	<MDC>
PCB2	R237	METAL O R	RS1/2WBJ-22	1	443522204T	<MDC>
PCB2	R238	METAL O R	RS1/2WBJ-22	1	443522204T	<MDC>
PCB2	R239	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R240	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R241	C-CARBON R	RN72K1J-220JE	1	435032204R1	<MDC>
PCB2	R242	C-CARBON R	RN72K1J-220JE	1	435032204R1	<MDC>
PCB2	R243	C-CARBON R	RN72K1J-220JE	1	435032204R1	<MDC>
PCB2	R244	C-CARBON R	RN72K1J-220JE	1	435032204R1	<MDC>
PCB2	R245	C-CARBON R	RN72K1J-330JE	1	435033304R1	<MDC>
PCB2	R246	NF CARBON R	R25J-0.22	1	415472294T	<MDC>
PCB2	R247	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R248	C-CARBON R	RN72K1J-331JE	1	435033314R1	<MDC>
PCB2	R249	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB2	R810	METAL O R	RS1WBJ-100	1	443621014T	

PCB2	R831	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB2	R832	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB2	R833	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB2	R834	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB2	R835	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R836	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R837	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R838	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R839	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R840	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R841	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R842	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB2	R843	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB2	R844	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB2	R845	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB2	R846	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB2	R847	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB2	R848	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB2	R849	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB2	R850	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB2	R854	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>
PCB2	R854	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPP>
PCB2	R854	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPA>
PCB2	R855	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>
PCB2	R855	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPP>
PCB2	R855	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPA>
PCB2	R856	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>
PCB2	R856	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPP>
PCB2	R856	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPA>
PCB2	R857	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>
PCB2	R857	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPP>
PCB2	R857	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPA>
PCB2	R858	C-CARBON R	RN72K1J-472JE	1	435034724R1	

PCB2	P201	SOCKET	CAM-C16	1	25053104R2	<MDC>
PCB2	P202	SOCKET	YKF51-5397N	1	25053201	<MDC>
PCB2	P211A	SOCKET	NSCT-15P1030	1	25051240	<MDC>
PCB2	P371B	WIRE TRAP	NPLG-11P594	1	25055632	
PCB2	P804	ST JACK	HSJ1002-01-6020	1	25045647	
PCB2	P805	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB2	P811A	SOCKET	NSCT-19P1317	1	25051530	
PCB2	P831	PIN JACK	NPJ-4PDRW592	1	25045812	
PCB2	P831 or	PIN JACK	NPJ-4PDBL308	(1)	25045491	
PCB2	P832	PIN JACK	NPJ-1PDP526	1	25045738	
PCB2	E201	RETAINER	(XM)	1	27142048	<MDC>

PCB3 **U08** MICROPROCESSOR PC BOARD (NADG-9670-1A/ 1C/ 1B)
PCB3 **U09** DISPLAY PC BOARD (NADIS-9671-1A/ 1C/ 1B)
PCB3 **U10** THERMAL SENSOR PC BOARD (NAETC-9672-1A/ 1C/ 1B)
PCB3 **U12** POWER SUPPLY PC BOARD (NAPS-9674-1A/ 1C/ 1B)
PCB3 **U13** TRANS. PRI. TERMINAL PC BOARD (NAETC-9675-1A/ 1C/ 1B)
PCB3 **U14** VOLUME PC BOARD (NAETC-9676-1A/ 1C/ 1B)
PCB3 **U15** VIDEO PC BOARD (NAVD-9677-1A/ 1C/ 1B)
PCB3 **U16** HEADPHONE JACK PC BOARD (NAETC-9678-1A/ 1C/ 1B)
PCB3

	CIRCUIT NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PCB3	U851	REMO SENS	NJL34H380A	1	241365	
PCB3	Q251	IC	LA7956-E	1	22241759	
PCB3	Q253	TR	KTA1504-GR	1	2216185R2	
PCB3	Q253 or	TR	2SA1162-GR	(1)	2214375R2	
PCB3	Q254	TR	RN1404	1	2214490R2	
PCB3	Q255	TR	RN1404	1	2214490R2	
PCB3	Q257	TR	RN1441	1	2215410R2	
PCB3	Q258	TR	RN1441	1	2215410R2	
PCB3	Q701	IC (MAIN MICROPROCESSOR)	M30624MWP-467P	1	22242588R3	
PCB3	Q702	IC	S-812C56AUA-C3K	1	22242207R2	
PCB3	Q703	TR	KRC104S	1	2216210R2	

PCB3	Q703 or	TR	RN1404	(1)	2214490R2
PCB3	Q704	TR	KRA102S	1	2216220R2
PCB3	Q704 or	TR	RN2402	(1)	2214530R2
PCB3	Q705	TR	KRA102S	1	2216220R2
PCB3	Q705 or	TR	RN2402	(1)	2214530R2
PCB3	Q706	TR	KRA102S	1	2216220R2
PCB3	Q706 or	TR	RN2402	(1)	2214530R2
PCB3	Q707	TR	KRC104S	1	2216210R2
PCB3	Q707 or	TR	RN1404	(1)	2214490R2
PCB3	Q708	TR	KRC104S	1	2216210R2
PCB3	Q708 or	TR	RN1404	(1)	2214490R2
PCB3	Q709	TR	KTA1504-GR	1	2216185R2
PCB3	Q709 or	TR	2SA1162-GR	(1)	2214375R2
PCB3	Q710	TR	KRC102S	1	2216190R2
PCB3	Q710 or	TR	RN1402	(1)	2214470R2
PCB3	Q851	IC	M66005-0001AHP	1	22242208R3
PCB3	Q852	FL TUBE	16-BT-128GNYK	1	212258A
PCB3	Q852A	HOLDER	(FL)	1	27191222C
PCB3	Q853	TR	KTC3875-GR	1	2216175R2
PCB3	Q853 or	TR	2SC2712-GR	(1)	2213145R2
PCB3	Q854	TR	KRC102S	1	2216190R2
PCB3	Q854 or	TR	RN1402	(1)	2214470R2
PCB3	Q855	TR	KRC102S	1	2216190R2
PCB3	Q855 or	TR	RN1402	(1)	2214470R2
PCB3	Q856	IC	LM61CIZ	1	22242212
PCB3	Q856A	RETAINER	(PTH)	1	27141884-1
PCB3	Q912	TR	2SC2458-GR	1	2212115T
PCB3	Q912 or	TR	KTC3199-GR	(1)	2215864T
PCB3	Q912 or	TR	2SC1740S-R	(1)	2213284T
PCB3	D251	C-DIODE	KDS4148U	1	223283R2
PCB3	D251 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D251 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D252	C-DIODE	KDS4148U	1	223283R2

PCB3	D252 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D252 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D701	C-DIODE	KDS4148U	1	223283R2
PCB3	D701 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D701 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D702	C-DIODE	KDS4148U	1	223283R2
PCB3	D702 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D702 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D703	C-DIODE	KDS4148U	1	223283R2
PCB3	D703 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D703 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D704	C-DIODE	KDS4148U	1	223283R2
PCB3	D704 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D704 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D705	ZENER D	UDZS5.1B	1	224550510R2
PCB3	D705 or	ZENER D	MAZ8051-M	(1)	224750512R2
PCB3	D706	C-DIODE	KDS4148U	1	223283R2
PCB3	D706 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D706 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D707	C-DIODE	KDS4148U	1	223283R2
PCB3	D707 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D707 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D708	C-DIODE	KDS4148U	1	223283R2
PCB3	D708 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D708 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D710	DIODE	RL1N4003	1	22380260T
PCB3	D711	DIODE	RL1N4003	1	22380260T
PCB3	D712	DIODE	RL1N4003	1	22380260T
PCB3	D713	DIODE	RL1N4003	1	22380260T
PCB3	D851	ZENER D	UDZS8.2B	1	224550820R2
PCB3	D851 or	ZENER D	MAZ8082-M	(1)	224750822R2
PCB3	D852	LED	SLI-343URC-TE7	1	225449T
PCB3	D853	LED	SLR-342MGTE7P	1	225455T

PCB3	D854	LED	SDPB3DD0C0000-ABCDEF	1	225473
PCB3	D855	SPCF D	SIR-34ST3F	1	225456
PCB3	D901	C-DIODE	KDS4148U	1	223283R2
PCB3	D901 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D901 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D902	C-DIODE	KDS4148U	1	223283R2
PCB3	D902 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D902 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D903	C-DIODE	KDS4148U	1	223283R2
PCB3	D903 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D903 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D904	C-DIODE	KDS4148U	1	223283R2
PCB3	D904 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D904 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D905	C-DIODE	KDS4148U	1	223283R2
PCB3	D905 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D905 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D906	C-DIODE	KDS4148U	1	223283R2
PCB3	D906 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D906 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D908	C-DIODE	KDS4148U	1	223283R2
PCB3	D908 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D908 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D909	C-DIODE	KDS4148U	1	223283R2
PCB3	D909 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D909 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D912	C-DIODE	KDS4148U	1	223283R2
PCB3	D912 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D912 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D913	C-DIODE	KDS4148U	1	223283R2
PCB3	D913 or	C-DIODE	1SS352	(1)	223234R2
PCB3	D913 or	C-DIODE	MA2J111	(1)	223279R2
PCB3	D914	ZENER D	UDZS5.1B	1	224550510R2

PCB3	D914 or	ZENER D	MAZ8051-M	(1)	224750512R2	
PCB3	D991	C-DIODE	KDS4148U	1	223283R2	
PCB3	D991 or	C-DIODE	1SS352	(1)	223234R2	
PCB3	D991 or	C-DIODE	MA2J111	(1)	223279R2	
PCB3	D992	C-DIODE	KDS4148U	1	223283R2	
PCB3	D992 or	C-DIODE	1SS352	(1)	223234R2	
PCB3	D992 or	C-DIODE	MA2J111	(1)	223279R2	
PCB3	X701	CERA LOCK	CSTLS6M00G-56-A0	1	3010427T	
PCB3	X701 or	CERA LOCK	CR06000-TG-A0R	(1)	3010433T	
PCB3	T902	P TRANS	NPT-1520JQ	1	2301812A	!, <MDC>
PCB3	T902	P TRANS	NPT-1520GQ	1	2301813A	!, <MPP>
PCB3	T902	P TRANS	NPT-1520GQ	1	2301813A	!, <MPA>
PCB3	L701	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L851	CHOKE COIL	LBC2518T470M	1	231364M470R2	
PCB3	L852	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PCB3	L853	CHOKE COIL	LBC2518T2R2M	1	231364M022R2	
PCB3	L854	CHOKE COIL	LBC2518T220M	1	231364M220R2	
PCB3	L855	CHOKE COIL	LBC2518T220M	1	231364M220R2	
PCB3	L856	CHOKE COIL	LBC2518T220M	1	231364M220R2	
PCB3	C251	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C252	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C256	VR C	CE04W16V-470M(VR)	1	394644717T	
PCB3	C257	VR C	CE04W16V-470M(VR)	1	394644717T	
PCB3	C258	VR C	CE04W50V-2.2M(VR)	1	394680227T	
PCB3	C259	VR C	CE04W50V-2.2M(VR)	1	394680227T	
PCB3	C260	VR C	CE04W50V-2.2M(VR)	1	394680227T	
PCB3	C261	VR C	CE04W50V-2.2M(VR)	1	394680227T	
PCB3	C262	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C263	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C701	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C702	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C703	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C704	EDL C	DX-5R5L224	1	3000079T	

PCB3	C705	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C706	VR C	CE04W50V-10M(VR)	1	394681007T	
PCB3	C707	VR C	CE04W50V-10M(VR)	1	394681007T	
PCB3	C708	C-CERA C	CK725B1A-474K1	1	332134745R1	
PCB3	C709	C-CERA C	CK725B1A-474K1	1	332134745R1	
PCB3	C710	VR C	CE04W6.3V-470M(VR)	1	394624717T	
PCB3	C711	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C712	VR C	CE04W50V-4.7M(VR)	1	394680477T	
PCB3	C713	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C714	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C715	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C716	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C717	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C718	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C719	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C720	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C721	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C722	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C723	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C724	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C725	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C726	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C727	C-CERA C	CK725B1H-102K1	1	332101025R1	
PCB3	C728	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C729	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C730	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C731	VR C	CE04W50V-2.2M(VR)	1	394680227T	
PCB3	C732	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C733	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C734	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C735	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C736	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C737	VR C	CE04W16V-470M(VR)	1	394644717T	

PCB3	C853	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C854	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C855	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C856	ELECT C	CE04W6.3V-100M	1	355721019T	
PCB3	C857	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C858	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C859	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C860	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C861	C-CERA C	CC725CH1H-101J1	1	342101014R1	
PCB3	C863	ELECT C	CE04W50V-33M	1	355783309T	
PCB3	C864	ELECT C	CE04W16V-100M	1	355741019T	
PCB3	C865	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB3	C866	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB3	C867	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB3	C868	C-CERA C	CK725B1H-223K1	1	332102235R1	
PCB3	C869	C-CERA C	CC725CH1H-102J1	1	342101024R1	
PCB3	C870	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C871	VR C	CE04W16V-100M(VR)	1	394641017T	
PCB3	C872	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB3	C873	C-CERA C	CK725B1H-103K1	1	332101035R1	
PCB3	C874	TF C	ECQ-B50V-102J	1	374721024T	
PCB3	C875	TF C	ECQ-B50V-102J	1	374721024T	
PCB3	C902	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	C903	VR C	CE04W35V-2200M(VR)	1	394662227S	
PCB3	C904	VR C	CE04W35V-100M(VR)	1	394661017T	
PCB3	C906	VR C	CE04W50V-4.7M(VR)	1	394680477T	
PCB3	C912	IS C	LE103-C3.5	1	3800042S	!
PCB3	C912 or	IS C	ECQU2A103MLC	(1)	3800039S	!
PCB3	C991	C-CERA C	CK725F1E-104Z1	1	332161040R1	
PCB3	R251	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R252	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB3	R253	C-CARBON R	RN72K1J-562JE	1	435035624R1	
PCB3	R256	C-CARBON R	RN72K1J-750JE	1	435037504R1	

PCB3	R257	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R258	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R259	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R260	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R261	C-CARBON R	RN72K1J-750JE	1	435037504R1	
PCB3	R262	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB3	R263	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB3	R264	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB3	R265	C-CARBON R	RN72K1J-684JE	1	435036844R1	
PCB3	R267	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R268	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R701	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R702	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R703	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R706	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R707	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC>
PCB3	R707	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MPA>
PCB3	R708	C-CARBON R	RN72K1J-102JE	1	435031024R1	<MPP>
PCB3	R709	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R710	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R711	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R712	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R713	C-CARBON R	RN72K1J-102JE	1	435031024R1	<MPP>
PCB3	R714	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R715	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB3	R716	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R717	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R718	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB3	R721	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R722	C-CARBON R	RN72K1J-470JE	1	435034704R1	<MDC>
PCB3	R723	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R724	C-CARBON R	RN72K1J-223JE	1	435032234R1	<MDC>
PCB3	R725	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB3	R726	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R727	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R728	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R729	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R730	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R731	C-CARBON R	RN72K1J-470JE	1	435034704R1	<MDC>
PCB3	R732	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R733	C-CARBON R	RN72K1J-470JE	1	435034704R1	<MDC>
PCB3	R734	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB3	R735	C-CARBON R	RN72K1J-221JE	1	435032214R1	<MDC>
PCB3	R736	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R737	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R738	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R739	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R740	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R741	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R742	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R743	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R744	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R745	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R746	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R747	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R749	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R751	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R752	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R753	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R755	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>
PCB3	R755	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPP>
PCB3	R755	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPA>
PCB3	R756	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>
PCB3	R756	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPP>
PCB3	R756	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MPA>
PCB3	R757	C-CARBON R	RN72K1J-000JE	1	435030004R1	<MDC>

PCB3	R757	C-CARBON R	RN72K1J-333JE	1	435033334R1	<MPP>
PCB3	R757	C-CARBON R	RN72K1J-563JE	1	435035634R1	<MPA>
PCB3	R758	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MDC>
PCB3	R758	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MPP>
PCB3	R758	C-CARBON R	RN72K1J-103JE	1	435031034R1	<MPA>
PCB3	R761	C-CARBON R	RN72K1J-563JE	1	435035634R1	<MPP>
PCB3	R761	C-CARBON R	RN72K1J-333JE	1	435033334R1	<MPA>
PCB3	R762	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R763	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R764	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R765	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R766	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R767	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R768	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R772	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R773	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R774	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R775	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R776	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R777	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R778	C-CARBON R	RN72K1J-470JE	1	435034704R1	
PCB3	R779	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R780	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R781	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R782	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R783	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R784	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R785	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R786	C-CARBON R	RN72K1J-472JE	1	435034724R1	
PCB3	R787	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R788	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R789	C-CARBON R	RN72K1J-272JE	1	435032724R1	
PCB3	R790	C-CARBON R	RN72K1J-272JE	1	435032724R1	

PCB3	R791	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R792	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R793	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R794	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R795	METAL O R	RS1/2WBJ-10	1	443521004T	
PCB3	R796	C-CARBON R	RN72K1J-473JE	1	435034734R1	<MDC>
PCB3	R797	C-CARBON R	RN72K1J-473JE	1	435034734R1	<MDC>
PCB3	R798	C-CARBON R	RN72K1J-473JE	1	435034734R1	<MDC>
PCB3	R799	C-CARBON R	RN72K1J-473JE	1	435034734R1	<MDC>
PCB3	R800	METAL O R	RS1WBJ-220	1	443622214T	<MDC>
PCB3	R801	C-CARBON R	RN72K1J-105JE	1	435031054R1	
PCB3	R802	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R803	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R804	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R805	C-CARBON R	RN72K1J-473JE	1	435034734R1	
PCB3	R806	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R807	C-CARBON R	RN72K1J-224JE	1	435032244R1	
PCB3	R808	METAL O R	RS1WBJ-220	1	443622214T	<MPP>
PCB3	R808	METAL O R	RS1WBJ-220	1	443622214T	<MPA>
PCB3	R809	METAL O R	RS1/2WBJ-82	1	443528204T	<MDC>
PCB3	R851	C-CARBON R	RN72K1J-273JE	1	435032734R1	
PCB3	R852	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB3	R853	C-CARBON R	RN72K1J-332JE	1	435033324R1	
PCB3	R854	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R855	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R856	C-CARBON R	RN72K1J-223JE	1	435032234R1	
PCB3	R857	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R858	C-CARBON R	RN72K1J-221JE	1	435032214R1	
PCB3	R859	C-CARBON R	RN72K1J-101JE	1	435031014R1	
PCB3	R860	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R861	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R862	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R863	C-CARBON R	RN72K1J-331JE	1	435033314R1	

PCB3	R864	C-CARBON R	RN72K1J-331JE	1	435033314R1	
PCB3	R865	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB3	R866	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB3	R867	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB3	R868	C-CARBON R	RN72K1J-471JE	1	435034714R1	
PCB3	R869	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB3	R870	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB3	R871	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB3	R872	C-CARBON R	RN72K1J-561JE	1	435035614R1	
PCB3	R873	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB3	R874	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB3	R875	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB3	R876	C-CARBON R	RN72K1J-821JE	1	435038214R1	
PCB3	R877	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB3	R878	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB3	R879	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB3	R880	C-CARBON R	RN72K1J-122JE	1	435031224R1	
PCB3	R881	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R882	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R883	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R884	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R885	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R886	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R887	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R888	C-CARBON R	RN72K1J-392JE	1	435033924R1	
PCB3	R889	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R890	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R891	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R892	C-CARBON R	RN72K1J-123JE	1	435031234R1	
PCB3	R893	C-CARBON R	RN72K1J-222JE	1	435032224R1	
PCB3	R894	C-CARBON R	RN72K1J-271JE	1	435032714R1	
PCB3	R895	C-CARBON R	RN72K1J-121JE	1	435031214R1	
PCB3	R896	C-CARBON R	RN72K1J-103JE	1	435031034R1	

PCB3	R897	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R898	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R899	C-CARBON R	RN72K1J-103JE	1	435031034R1	
PCB3	R909	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R913	C-CARBON R	RN72K1J-102JE	1	435031024R1	
PCB3	R914	C-CARBON R	RN72K1J-104JE	1	435031044R1	
PCB3	R915	METAL O R	RS1/2WBJ-220	1	443522214T	<MDC>
PCB3	R915	METAL O R	RS1/2WBJ-150	1	443521514T	<MPP>
PCB3	R915	METAL O R	RS1/2WBJ-150	1	443521514T	<MPA>
PCB3	RL902	RELAY	NRL-1P5A-DC9-179	1	25065669	!
PCB3	S851	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S852	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S853	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S854	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S855	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S856	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S857	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S858	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S859	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S860	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S861	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S862	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S863	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S864	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S865	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S866	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S867	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S868	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S869	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S870	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S871	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S872	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S873	PUSH SW	NPS-111-S681	1	25035718T	

PCB3	S874	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S875	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S876	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S877	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S878	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S879	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S880	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S881	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S882	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S883	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S884	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S885	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S886	PUSH SW	NPS-111-S681	1	25035718T	
PCB3	S887	R ENCODE	EC12E2425WITH WASHER	1	25065655W	
PCB3	P211B	PLUG	NPLG-15P667	1	25055711	<MDC>
PCB3	P251A	SOCKET	NSCT-9P1024	1	25051234	
PCB3	P251B	PLUG	NPLG-9P661	1	25055705	
PCB3	P252	PIN JACK	NPJ-3PDYE208	1	25045363	
PCB3	P253	PIN JACK	NPJ-3PDYE208	1	25045363	
PCB3	P503	JACK	YKB26-5138	1	25045257	
PCB3	P701A	SOCKET	NSCT-7P2187	1	25052290	
PCB3	P702A	SOCKET	NSCT-19P2199	1	25052302	
PCB3	P704A	SOCKET	NSCT-13P2106	1	25052209	
PCB3	P705	SOCKET	NSCT-9P2427	1	25052530	
PCB3	P707	ST JACK	MSJ-035-22	1	25045887	
PCB3	P707 or	JACK	YKB21-5130	(1)	25045387	
PCB3	P708	TRM(SCREW)	NEJITANSI M3	1	25065425	
PCB3	P715A	SOCKET	NSCT-27P2120	1	25052223	
PCB3	P715B	SOCKET	NSCT-27P2157	1	25052260	
PCB3	P811B	PLUG	NPLG-19P764	1	25055808	
PCB3	P901A	PLUG	NPLG-2P631	1	25055675	!
PCB3	P910	AC OUTLET	NSCT-4P913	1	25051126	!, <MDC>
PCB3	P910	AC OUTLET	NSCT-2P2013	1	25052115	!, <MPA>

PCB3	P910	SOCKET	NSCT-4P912	1	25051125	!, <MPP>
PCB3	P911	CRIMP AS	CRIMP AS	1	2069943351UL	!
PCB3	P912	CRIMP AS	CRIMP AS	1	2069943459UL	!
PCB3	P991	RETAINER	MET37-0002	1	27142009T	
PCB3	F901A	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB3	F901B	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MDC>
PCB3	F902A	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MPP>
PCB3	F902A	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MPA>
PCB3	F902B	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MPP>
PCB3	F902B	FUSE HOL	NSCT-1P2031	1	25052133T	!, <MPA>
PCB3	F903A	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB3	F903B	FUSE HOL	NSCT-1P2031	1	25052133T	!
PCB3	F903C	LABEL	T2.5AL250V	1	29361747	!, <MPP>
PCB3	F903C	LABEL	T2.5AL250V	1	29361747	!, <MPA>
PCB3	JL703	JUMPER LEAD	JL3 300 H	1	---	NSP
PCB3	JL703A	WIRE HOL	NSCT-3P894	1	25051107	
PCB3	JL703B	SOCKET	NSCT-3P95	1	25050267	
PCB3	JL711	JUMPER LEAD	JL3 350 H	1	---	NSP
PCB3	JL711A	WIRE HOL	NSCT-3P894	1	25051107	
PCB3	JL716	JUMPER LEAD	JL3 150 H	1	---	NSP
PCB3	JL716A	WIRE HOL	NSCT-3P894	1	25051107	
PCB3	JL851	JUMPER LEAD	JL3 100 H	1	---	NSP
PCB3	JL851A	WIRE HOL	NSCT-3P894	1	25051107	
PCB3	JL851B	SOCKET	NSCT-3P108	1	25050280	
PCB3	JL911	JMP LEAD	JL7 500 B	1	---	NSP
PCB3	JL911A	WIRE HOL	NSCT-7P878	1	25051091	
PCB3	JL911B	WIRE TRAP	NPLG-7P590	1	25055628	

TX-8555

PACKING PROCEDURE PARTS LIST

	REF. NO.	PART NAME	DESCRIPTION	Q'TY	PART NO. (SN)	REMARKS
PV	A601	PAD	L & R 1set	1	29092400	

PV	A602	POLY BAG	w850 x d650	1	29100245	
PV	A603	POLY BAG	w250 x d350	1	29100250A	
PV	A604	POLY BAG	w250 x d350	1	29100250A	
PV	A605	TAPE	NITTO NO.29 (yellow)	(1)	29110149	
PV	A606	PP TAPE	W50 SBT-70	(1)	29110200	
PV	A701	CARTON	8555	1	29054860	<MDC>
PV	A701	CARTON	8555	1	29054938	<MPA>
PV	A701	CARTON	8555	1	29054938	<MPP>
PV	A702	UPC LABEL	TX8555 (B)	1	29390506	(B) <MDC>
PV	A702	EAN LABEL	TX8555BMPA	1	29390509	(B) <MPA>
PV	A702	EAN LABEL	TX8555BMPP	1	29390507	(B) <MPP>
PV	A702	EAN LABEL	TX8555SMPP	1	29390508	(S) <MPP>
PV	A801	INS MANUAL	En (TX-8555)	1	29344832	
PV	A802	INS MANUAL	U2FrEs (TX-8555)	1	29344833	<MDC>
PV	A802	INS MANUAL	U2FrEs (TX-8555)	1	29344833	<MPP>
PV	A803	INS MANUAL	U2ItDe (TX-8555)	1	29344834	<MPP>
PV	A804	INS MANUAL	U2NlSv (TX-8555)	1	29344835	<MPP>
PV	A805	INS MANUAL	U3EnFrEs (XM/SIRIUS_TX-8555)	1	29344836	<MDC>
PV	A806	INST SHEET	En (XM RADIO)	1	29355602	<MDC>
PV	A807	INST SHEET	WEEE	1	29355537	<MPP>
PV	A808	WRNTY CARD	(ONKYO)	1	29365102A	<MDC>
PV	A809	HANDBILL	(DS-A2X) US	1	29380150	<MDC>
PV	A809	HANDBILL	(DS-A2X) AUS	1	29380152	<MPA>
PV	A809	HANDBILL	(DS-A2X) EU	1	29380151	<MPP>
PV	A810	HANDBILL	(SIRIUS)	1	29380149	<MDC>
PV	A821	REMO CON	RC-728M	1	24140728	
PV	A822	BATTERY	R6/AA (UM-3)	2	3010194	
PV	A822 or	BATTERY	R6/AA (UM-3)	(2)	3010054	
PV	A823	ANT COIL	NMA-3057	1	232140	
PV	A824	FM ANT AS	Type W	1	292191	

ONKYO CORPORATION
Sales & Product Planning Div. : 2-1, Nisshin-cho, Neyagawa-shi, OSAKA 572-8540, JAPAN
Tel: 072-831-8023 Fax: 072-831-8163

ONKYO U.S.A. CORPORATION
18 Park Way, Upper Saddle River, N.J. 07458, U.S.A.
Tel: 201-785-2600 Fax: 201-785-2650 http://www.us.onkyo.com/

ONKYO EUROPE ELECTRONICS GmbH
Liegnitzerstrasse 6, 82194 Groebenzell, GERMANY
Tel: +49-8142-4401-0 Fax: +49-8142-4401-555 http://www.eu.onkyo.com/

ONKYO EUROPE UK Office
Suite 1, Gregories Court, Gregories Road, Beaconsfield, Buckinghamshire, HP9 1HQ
UNITED KINGDOM Tel: +44-(0)1494-681515 Fax: +44(0)-1494-680452

ONKYO CHINA LIMITED
Units 2102-2107, Metroplaza Tower I, 223 Hing Fong Road, Kwai Chung,
N.T., HONG KONG Tel: 852-2429-3118 Fax: 852-2428-9039
http://www.ch.onkyo.com/

ONKYO
HOMEPAGE
http://www.onkyo.com/